

BestDT* QC Plot C0002F

Interval: 3974m – 2818m (1:200)

COMPANY: JAMSTEC

WELL: C0002F

FIELD: Nankai-Kumano

Prefecture: Wakayama

COUNTRY: Japan

Date Processed: 13-Nov-2012 Date Logged: 27-Oct-2012

Job Number: C31290 Processed at: DS Beijing

Well Location: Philippine Sea

Latitude: 33° 18' 3.042" N Longitude: 136° 38' 12.174" E

Elevations: KB: 28.5m DF: 28.5m GL: -1939m

FOLD HERE The well name, location and borehole reference data were furnished by the customer.

Any interpretation, research, analysis, data, results, estimates, or recommendation furnished with the services or otherwise communicated by Schlumberger to the customer at any time in connection with the services are opinions based on inferences from measurements, empirical relationships, and/or assumptions; which, inferences, empirical relationships and/or assumptions are not infallible and with respect to which professionals in the industry may differ. Accordingly, Schlumberger cannot and does not warrant the accuracy, correctness, or completeness of any such interpretation, research, analysis, data, results, estimates, or recommendation. The customer acknowledges that it is accepting the services "as is," that Schlumberger makes no representation or warranty, express or implied, of any kind or description in respect thereto, and that such services are delivered with the explicit understanding and agreement that any action taken based on the services received shall be at its own risk and responsibility, and no claim shall be made against Schlumberger as a consequence thereof.

@ 2010 Schlumberger. All rights reserved.

MD 1 : 200 m	Bit Size	STPrjR	STPrjT	WF VDL
	6 (in) 16	40 (us/ft) 240	40 (us/ft) 240	300 (us) 3278
GR	DtRC	DtTC	TICS	
0 (gAPI) 150	40 (us/ft) 240	40 (us/ft) 240	300 (us) 3278	

2820


2830

2840

2850

2860

2870

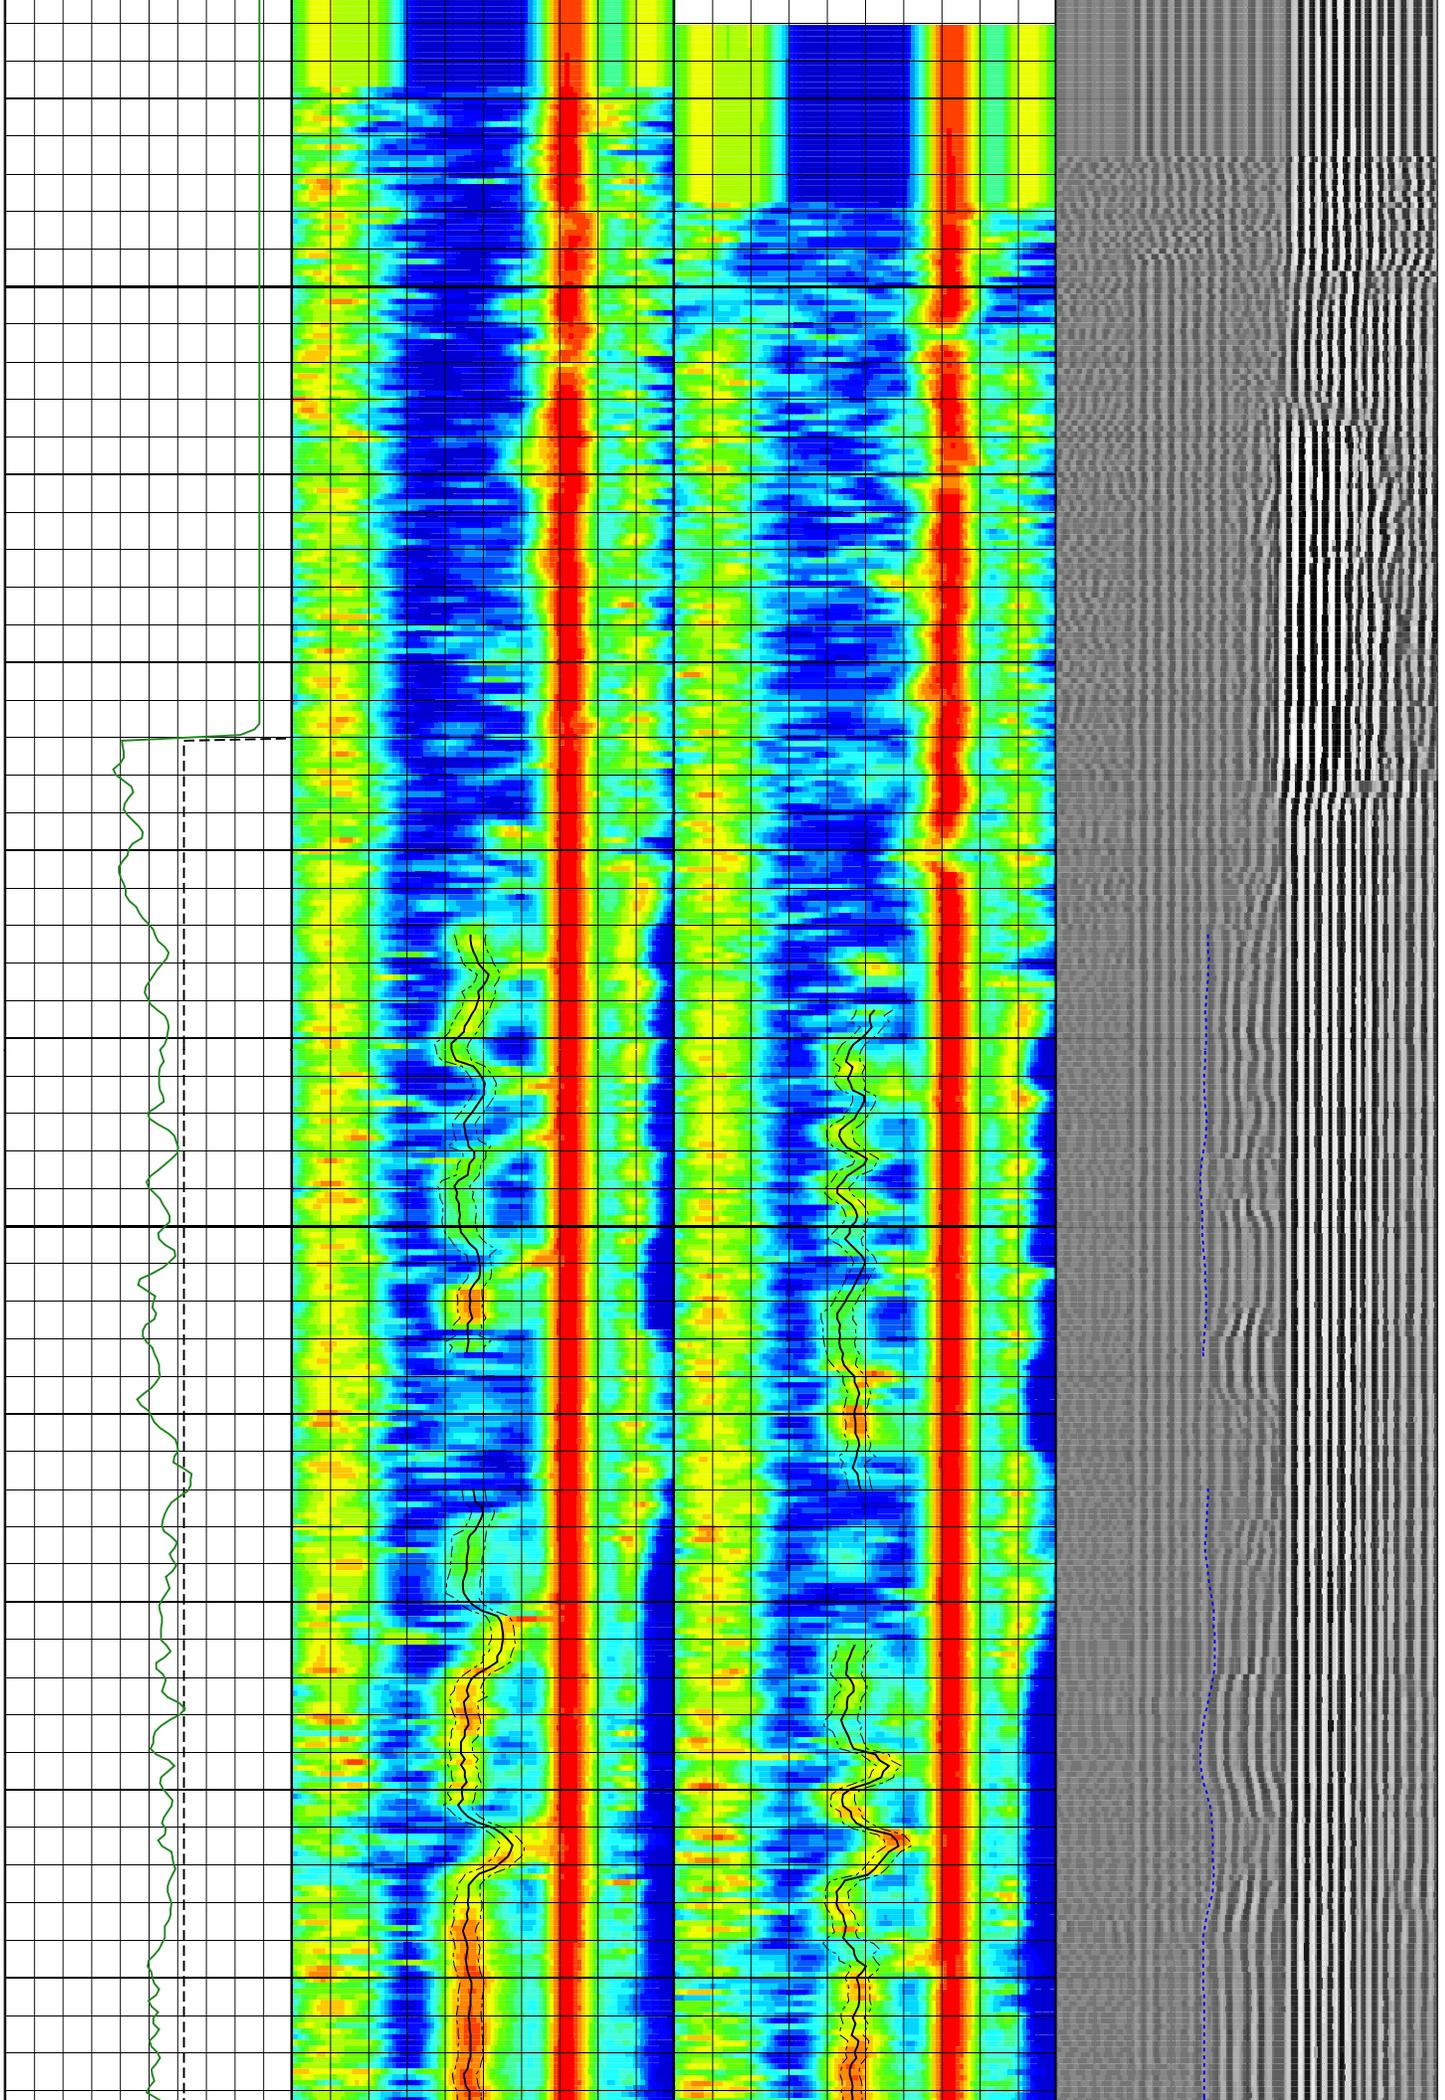


2880


2890


2900

2910

2920

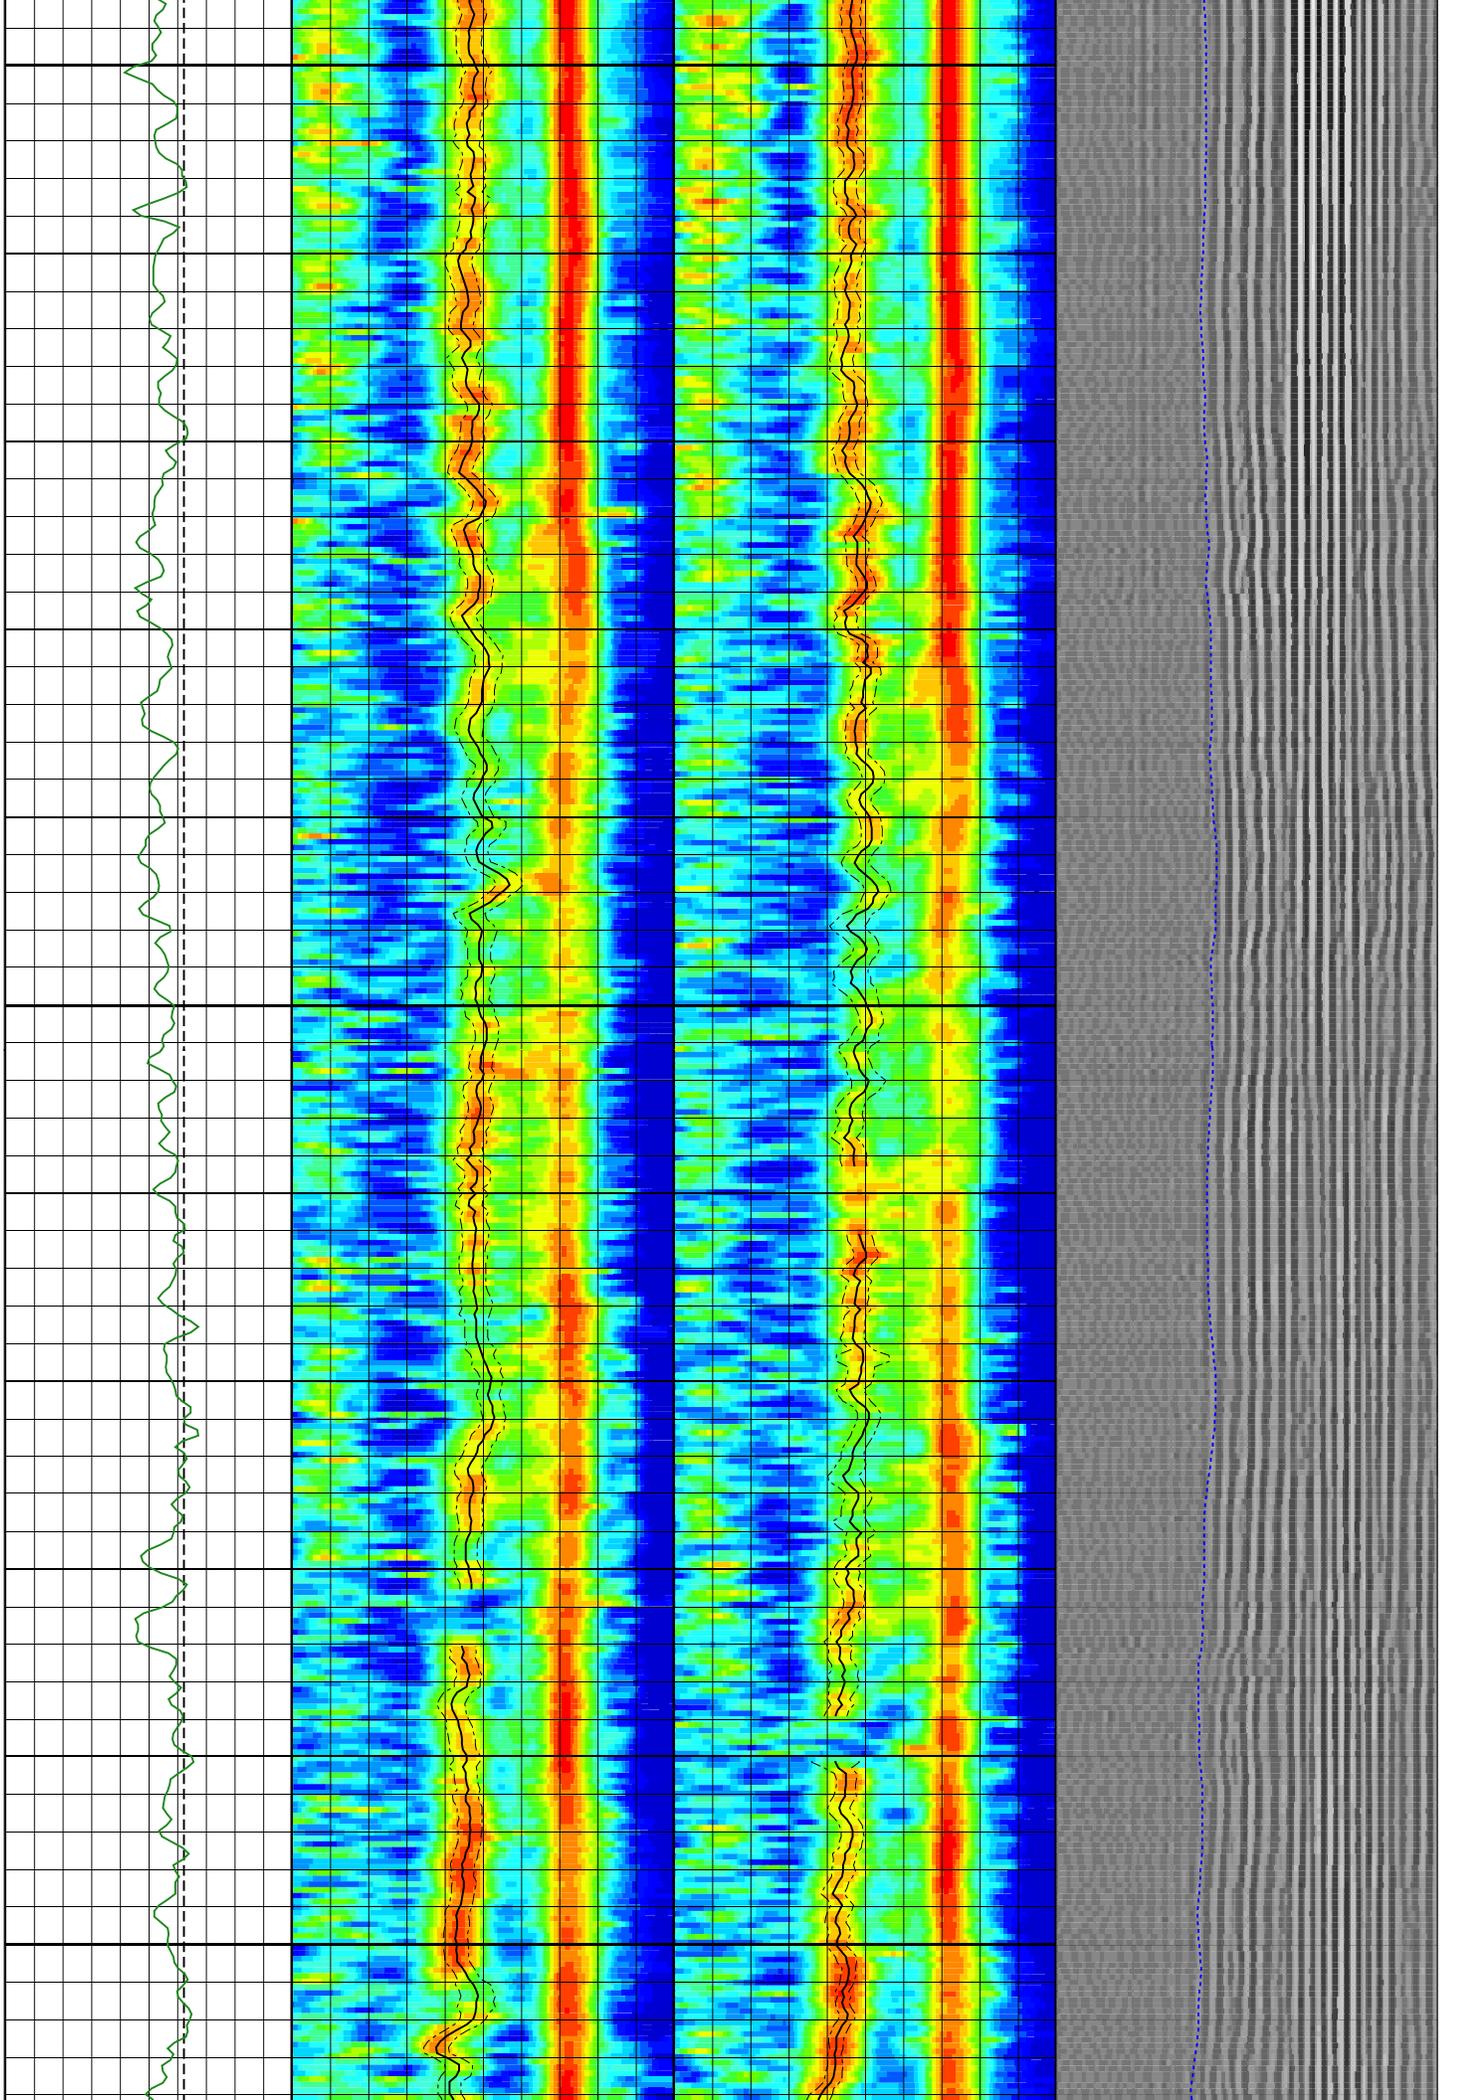

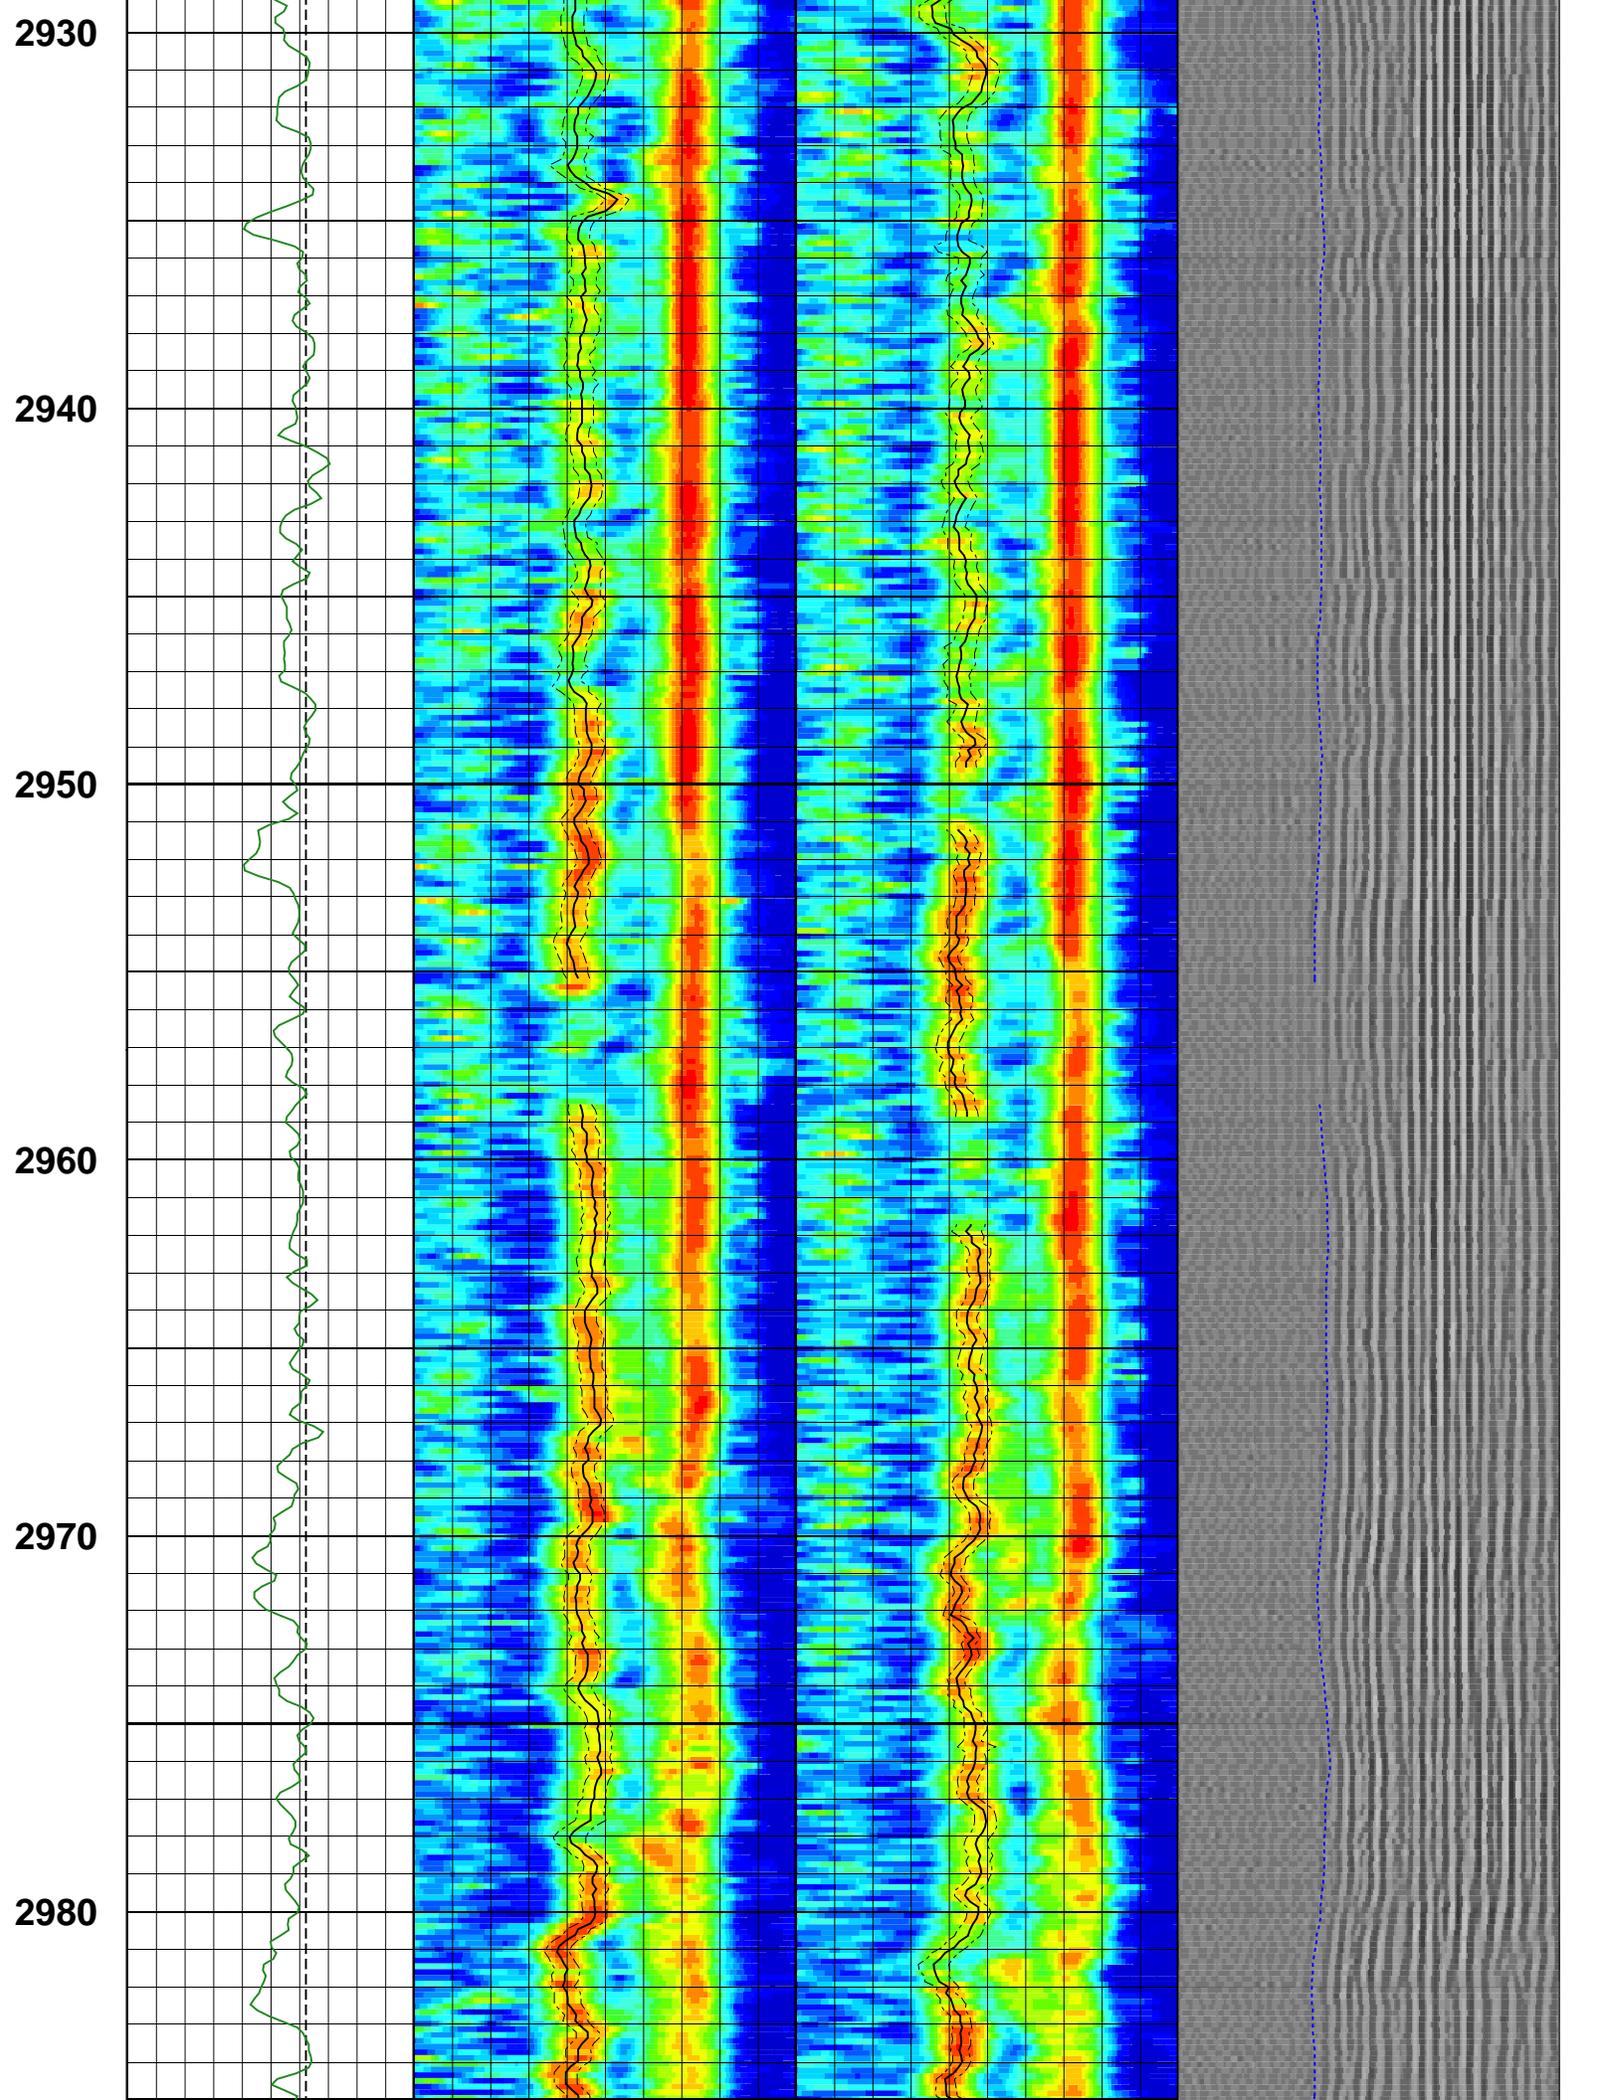

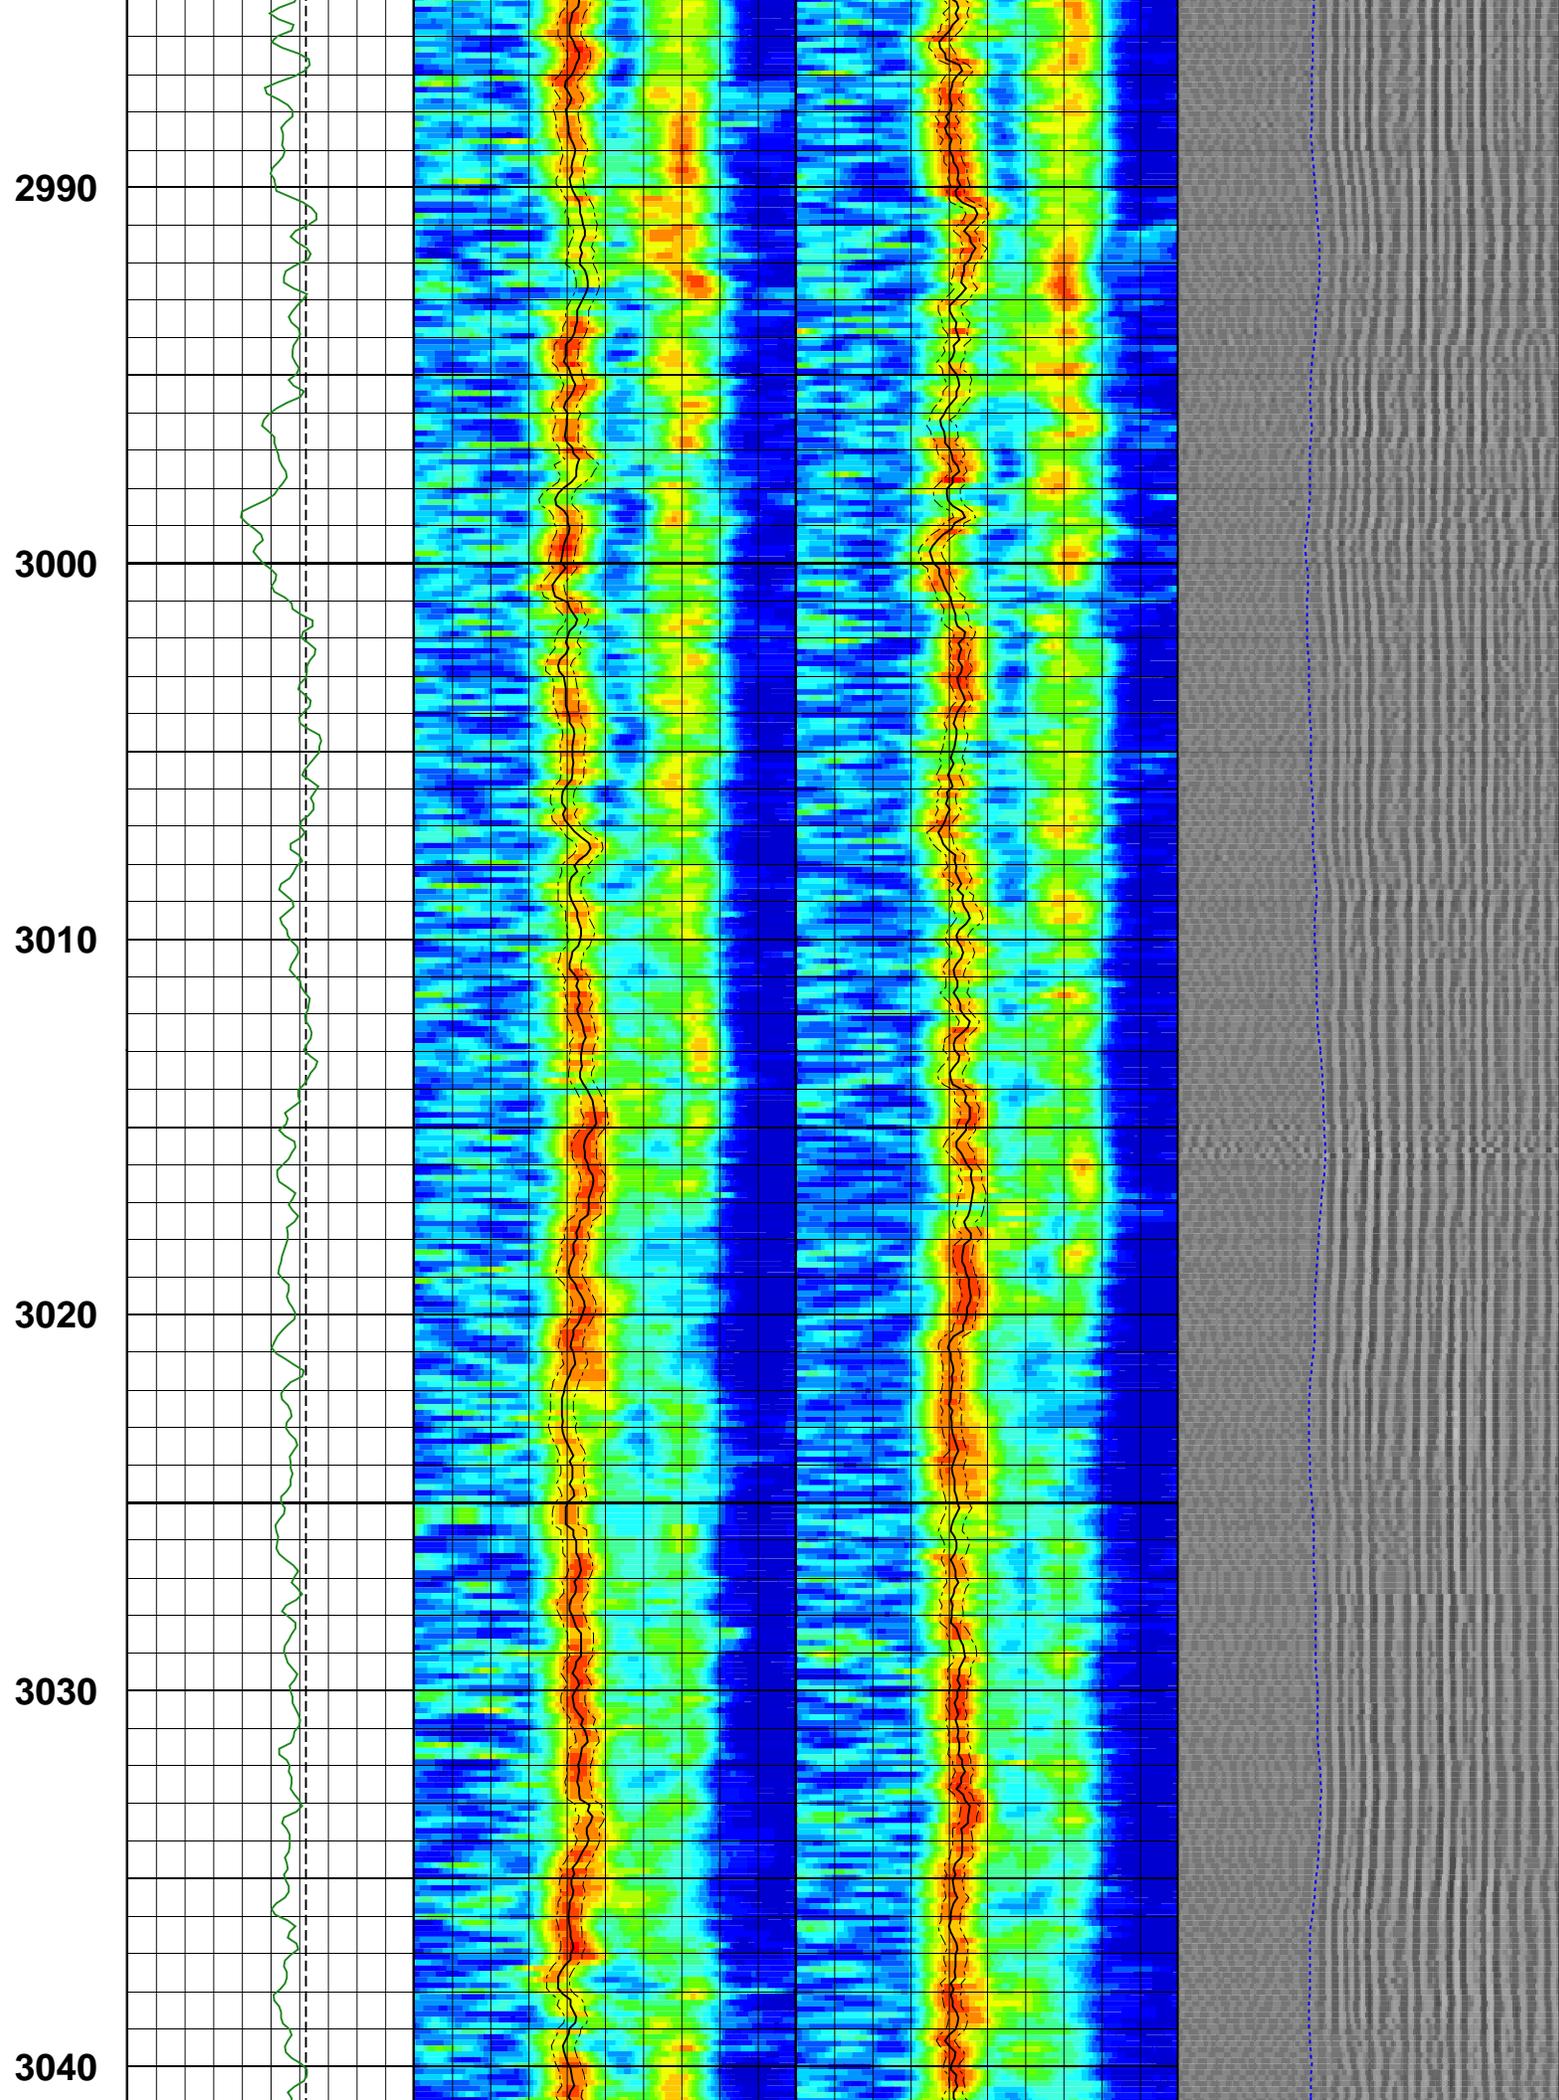


3050

3060


3070

3080

3090

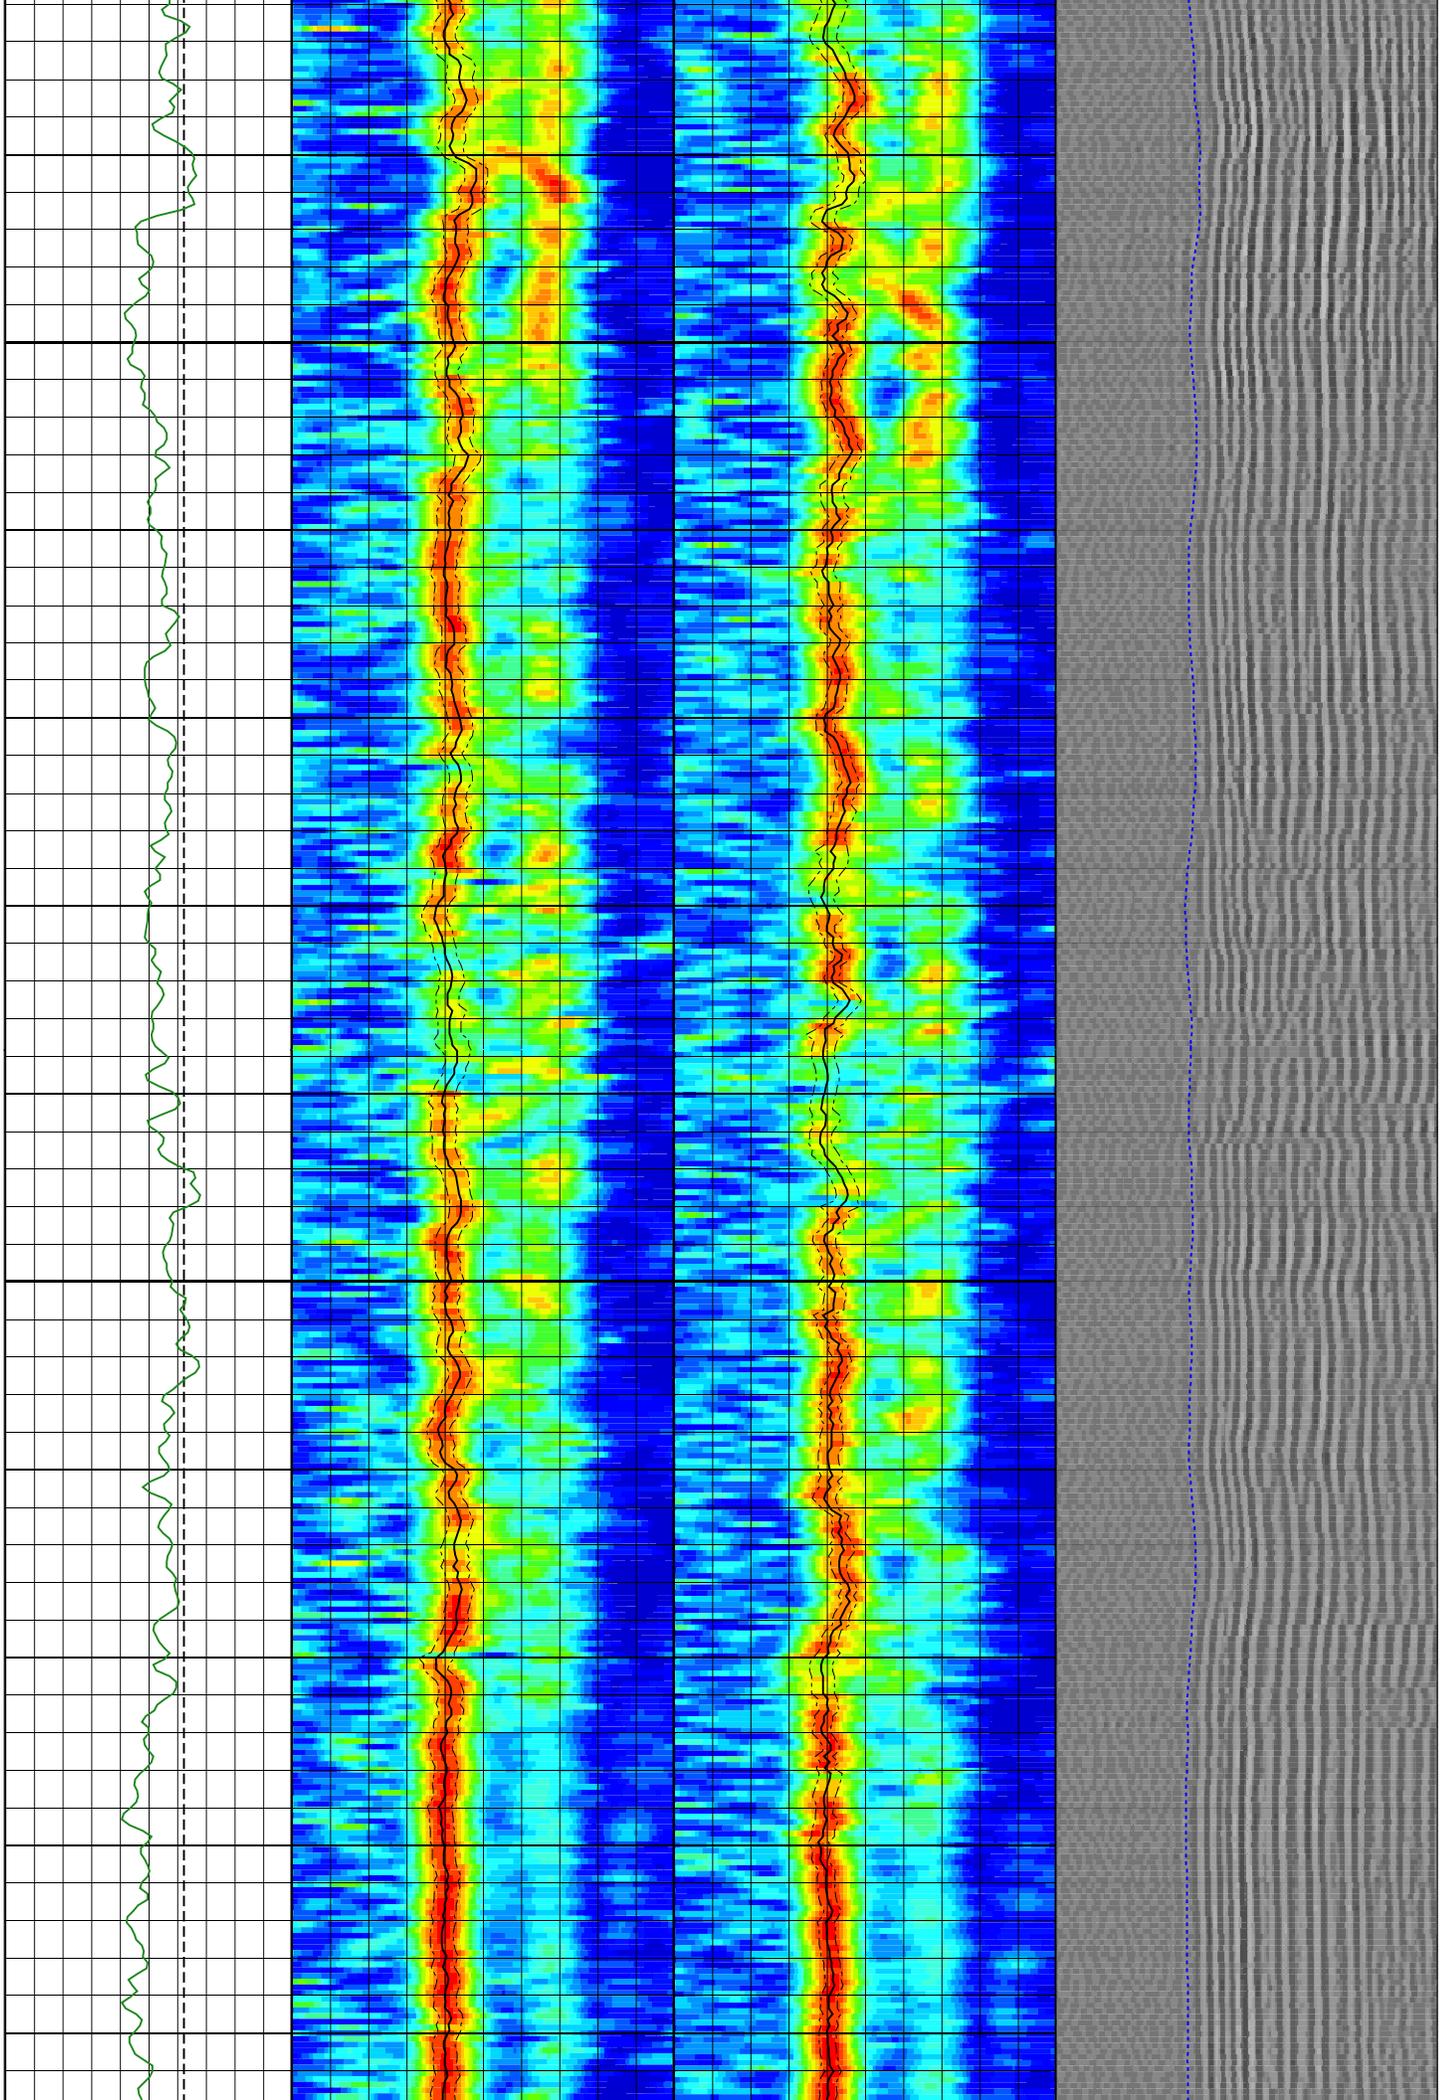

3100
3110
3120
3130
3140
3150

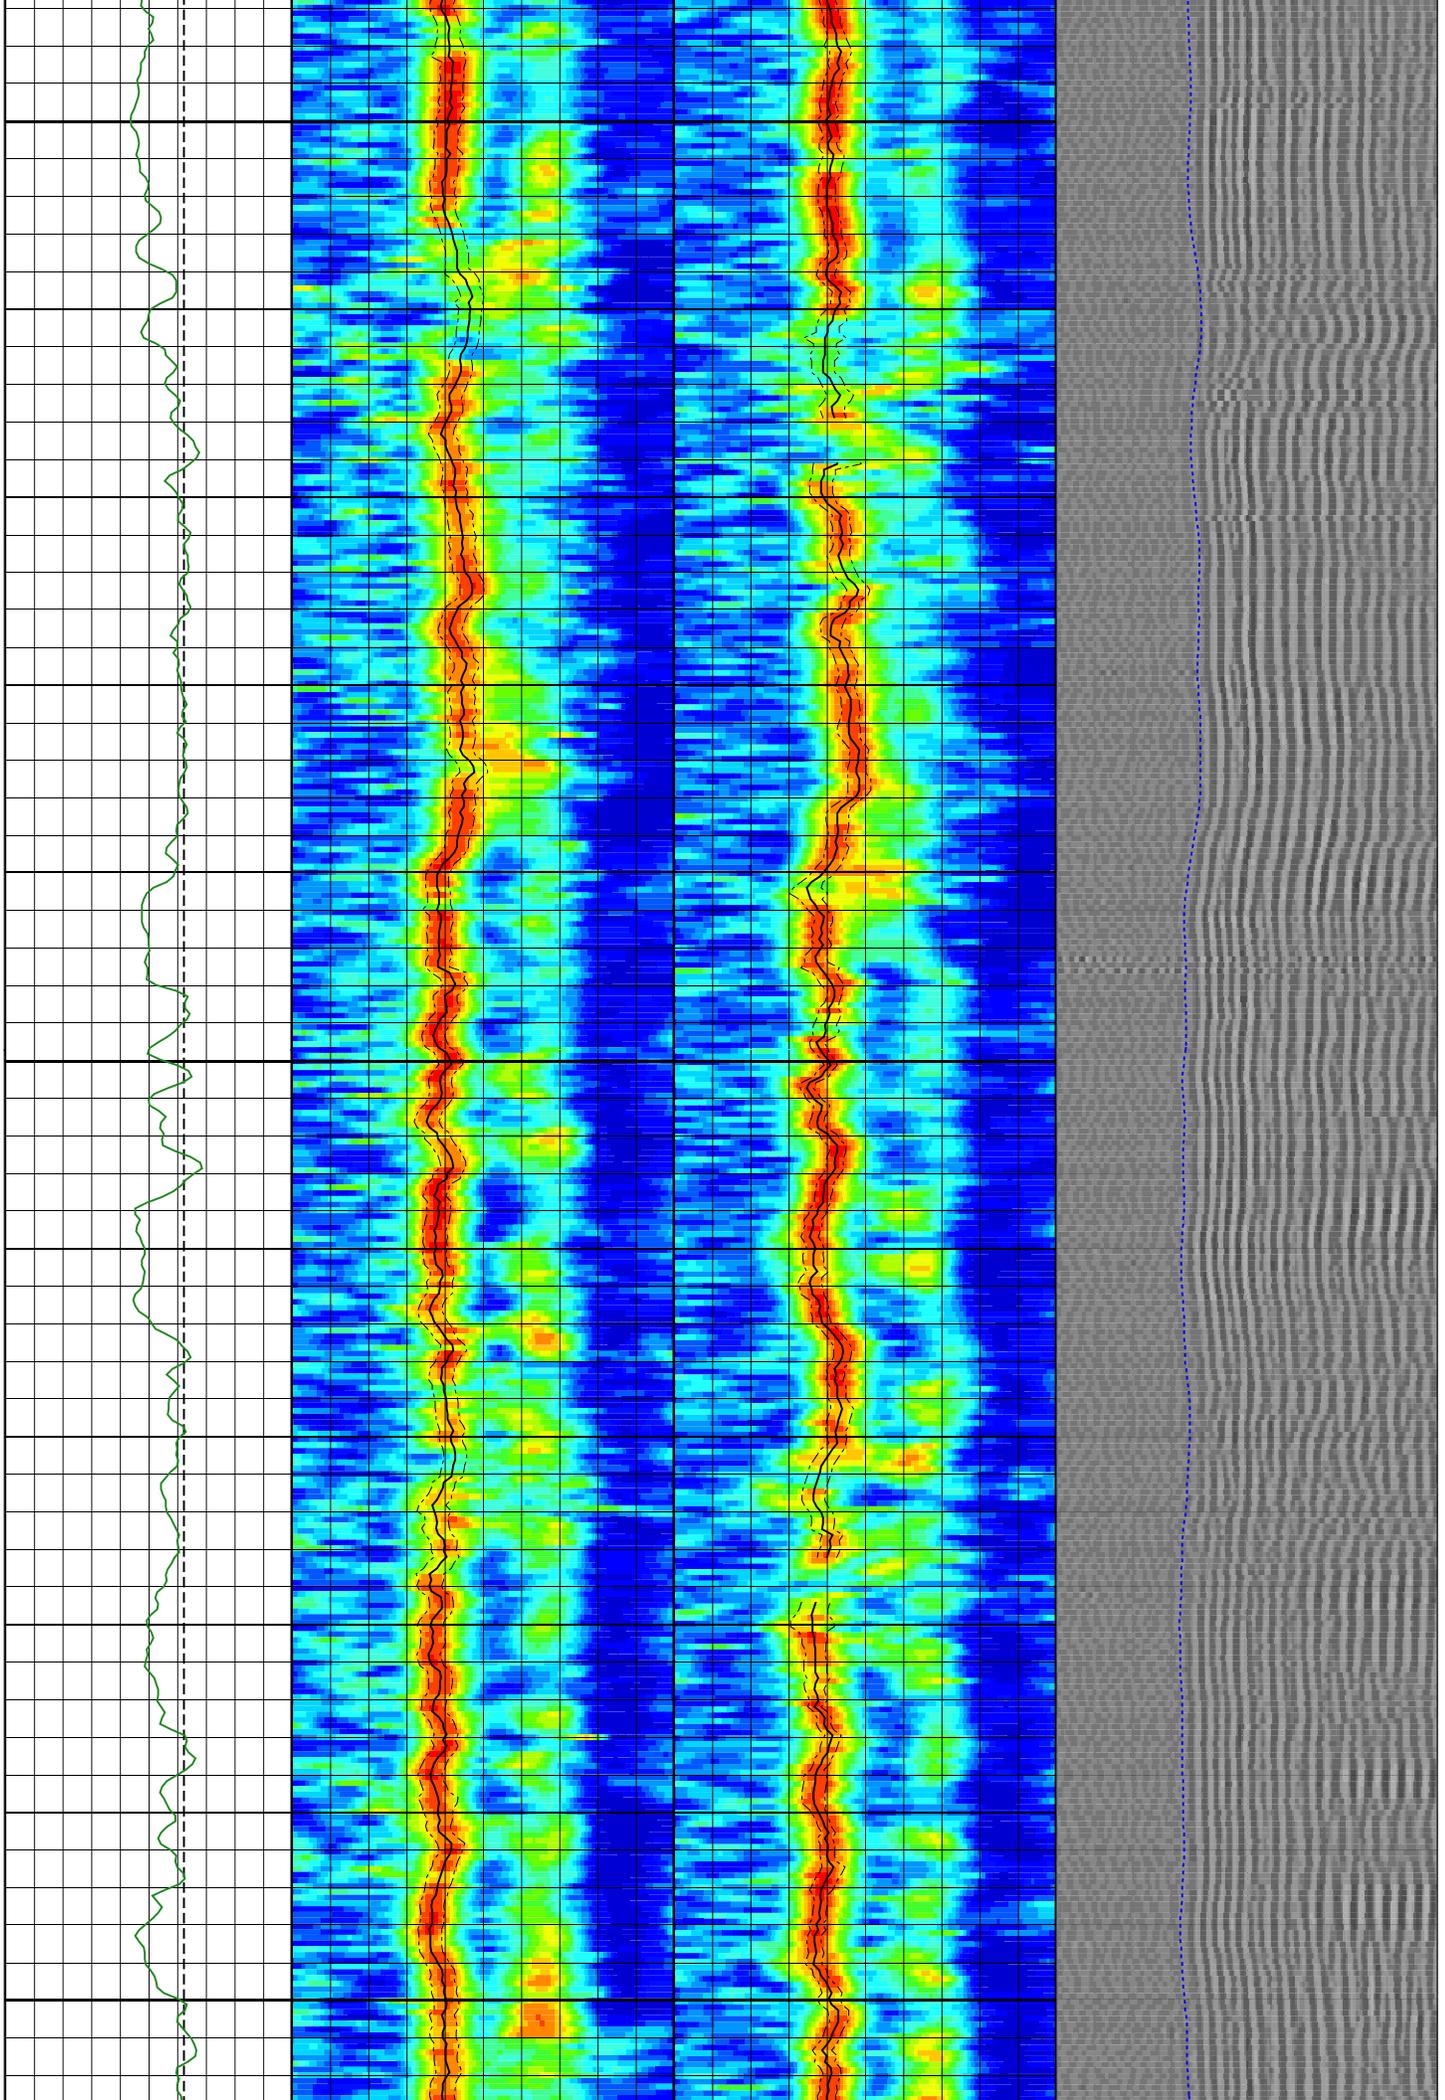


3160

3170

3180

3190

3200

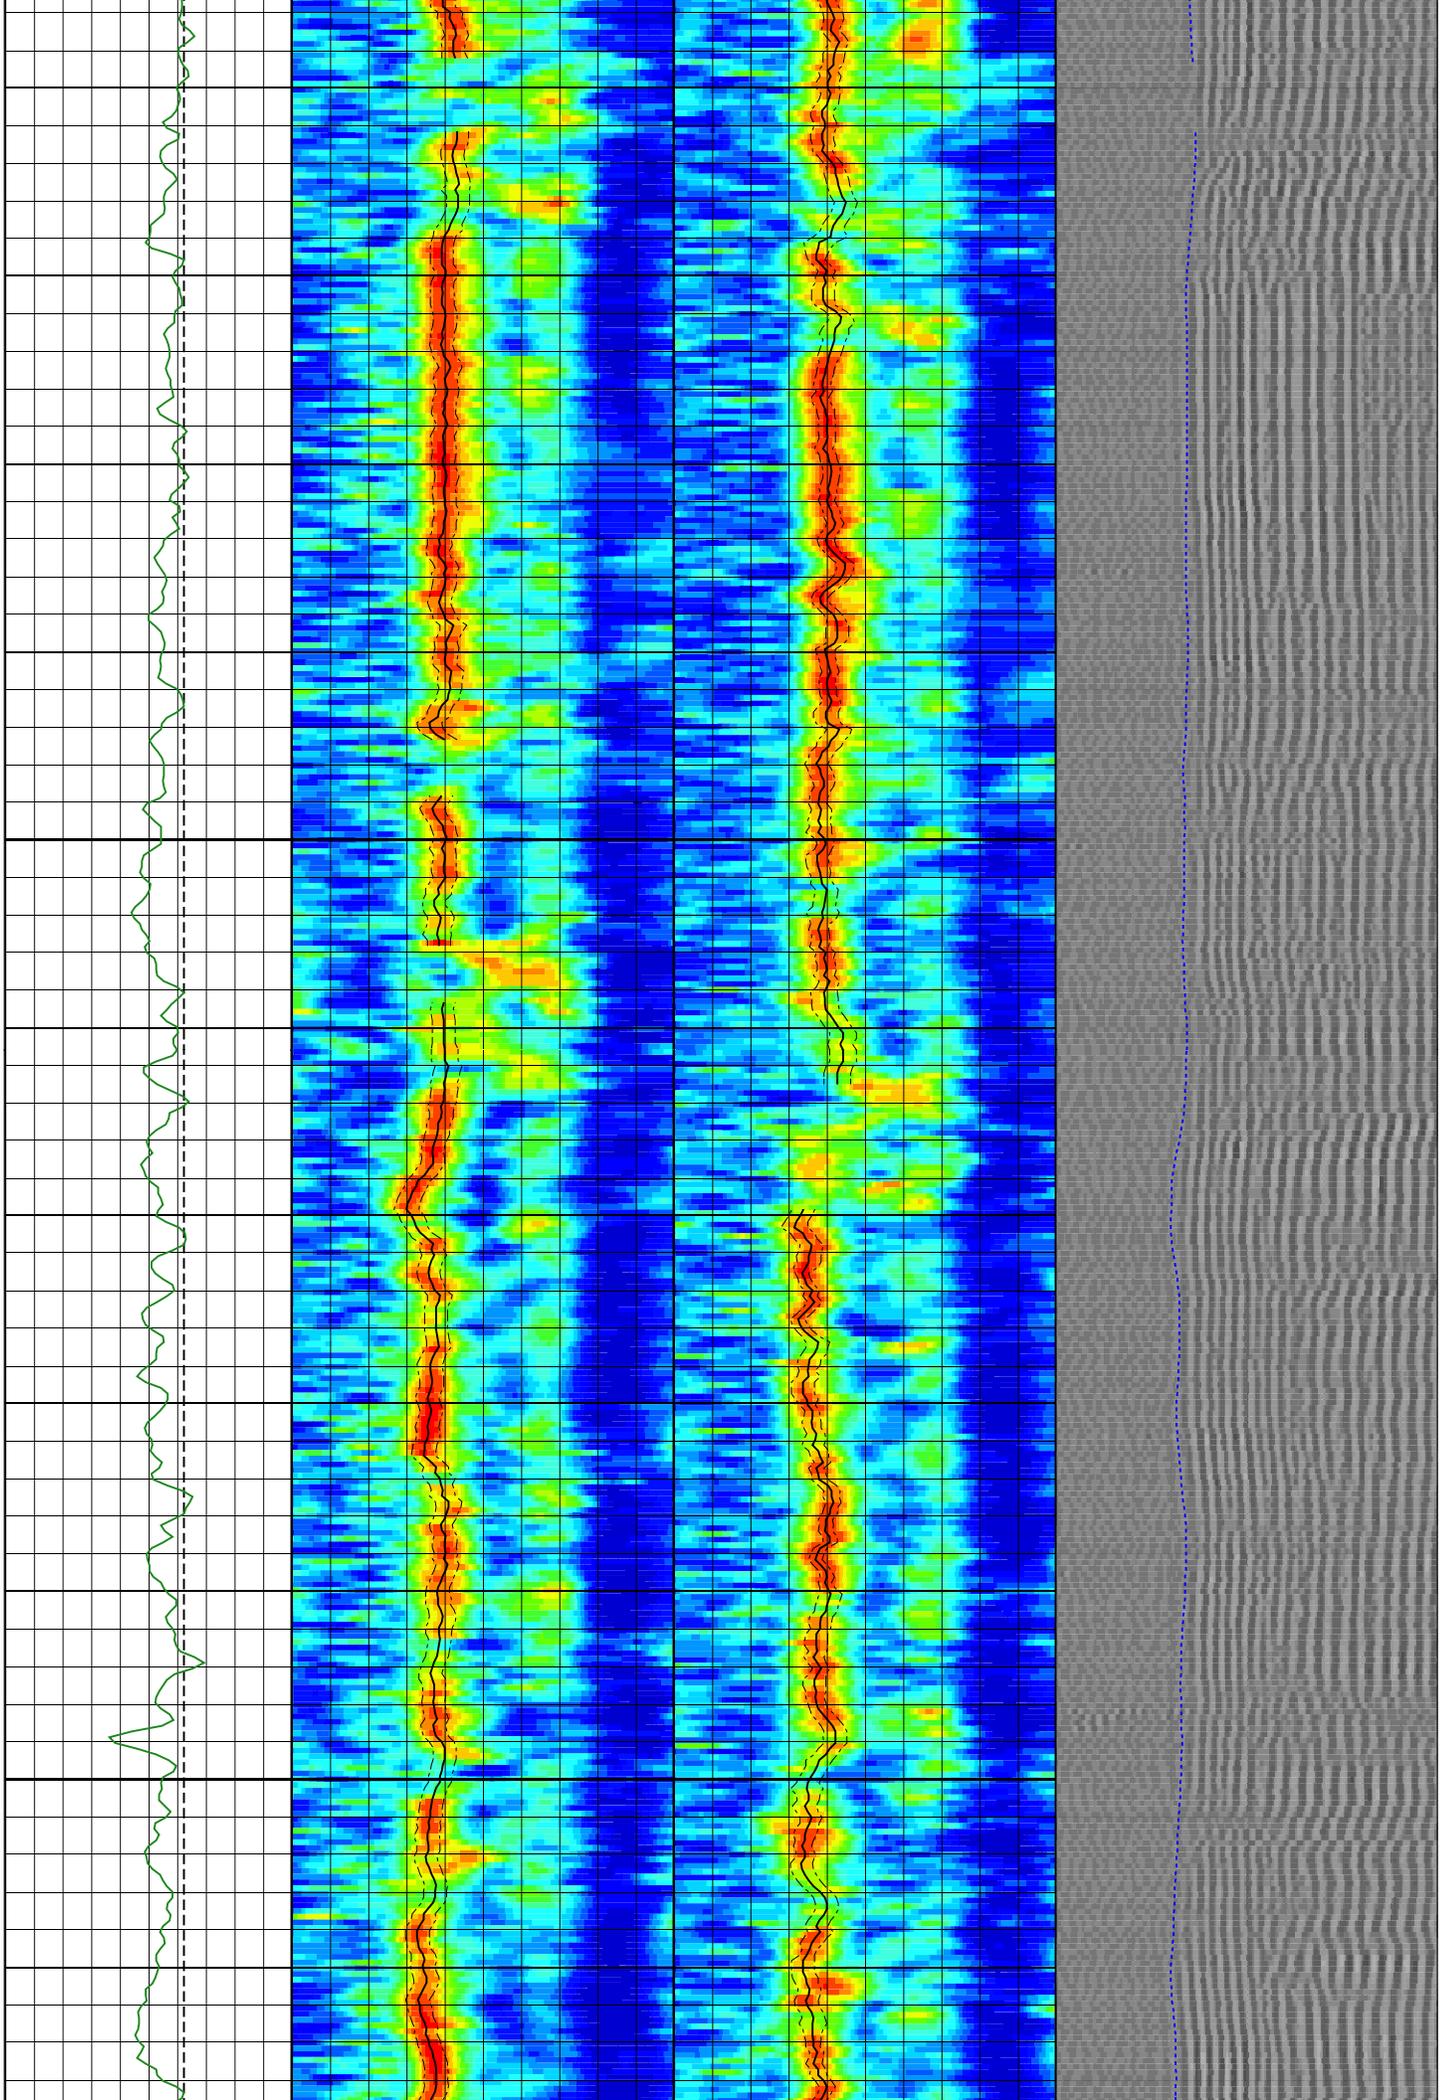

3210


3220


3230


3240

3250

3260

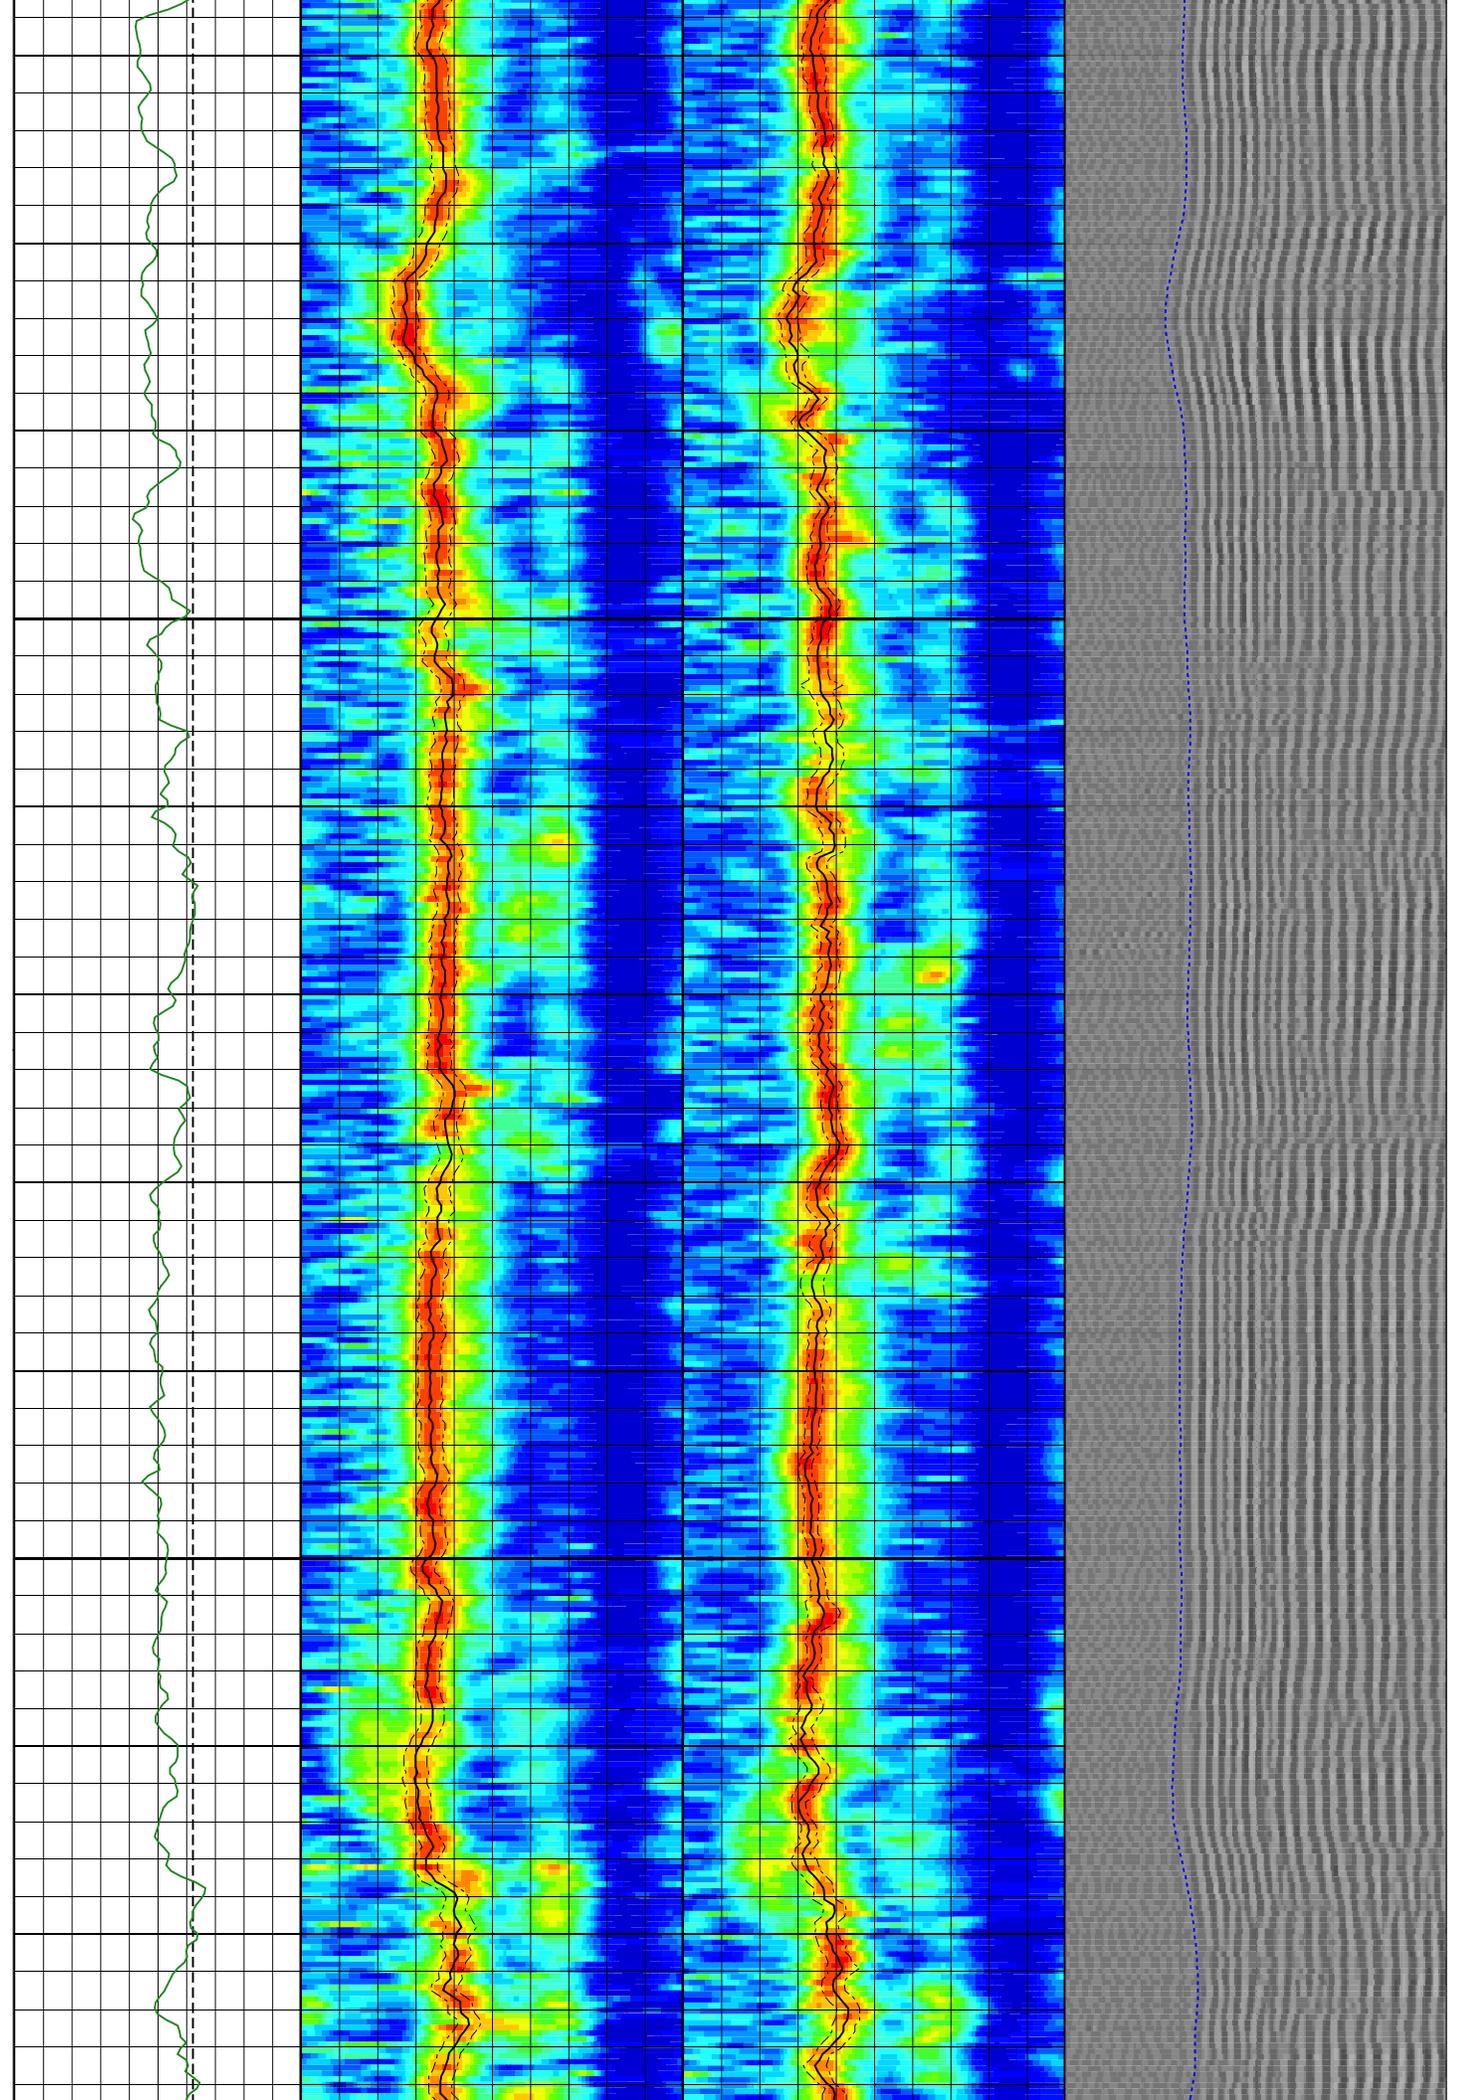

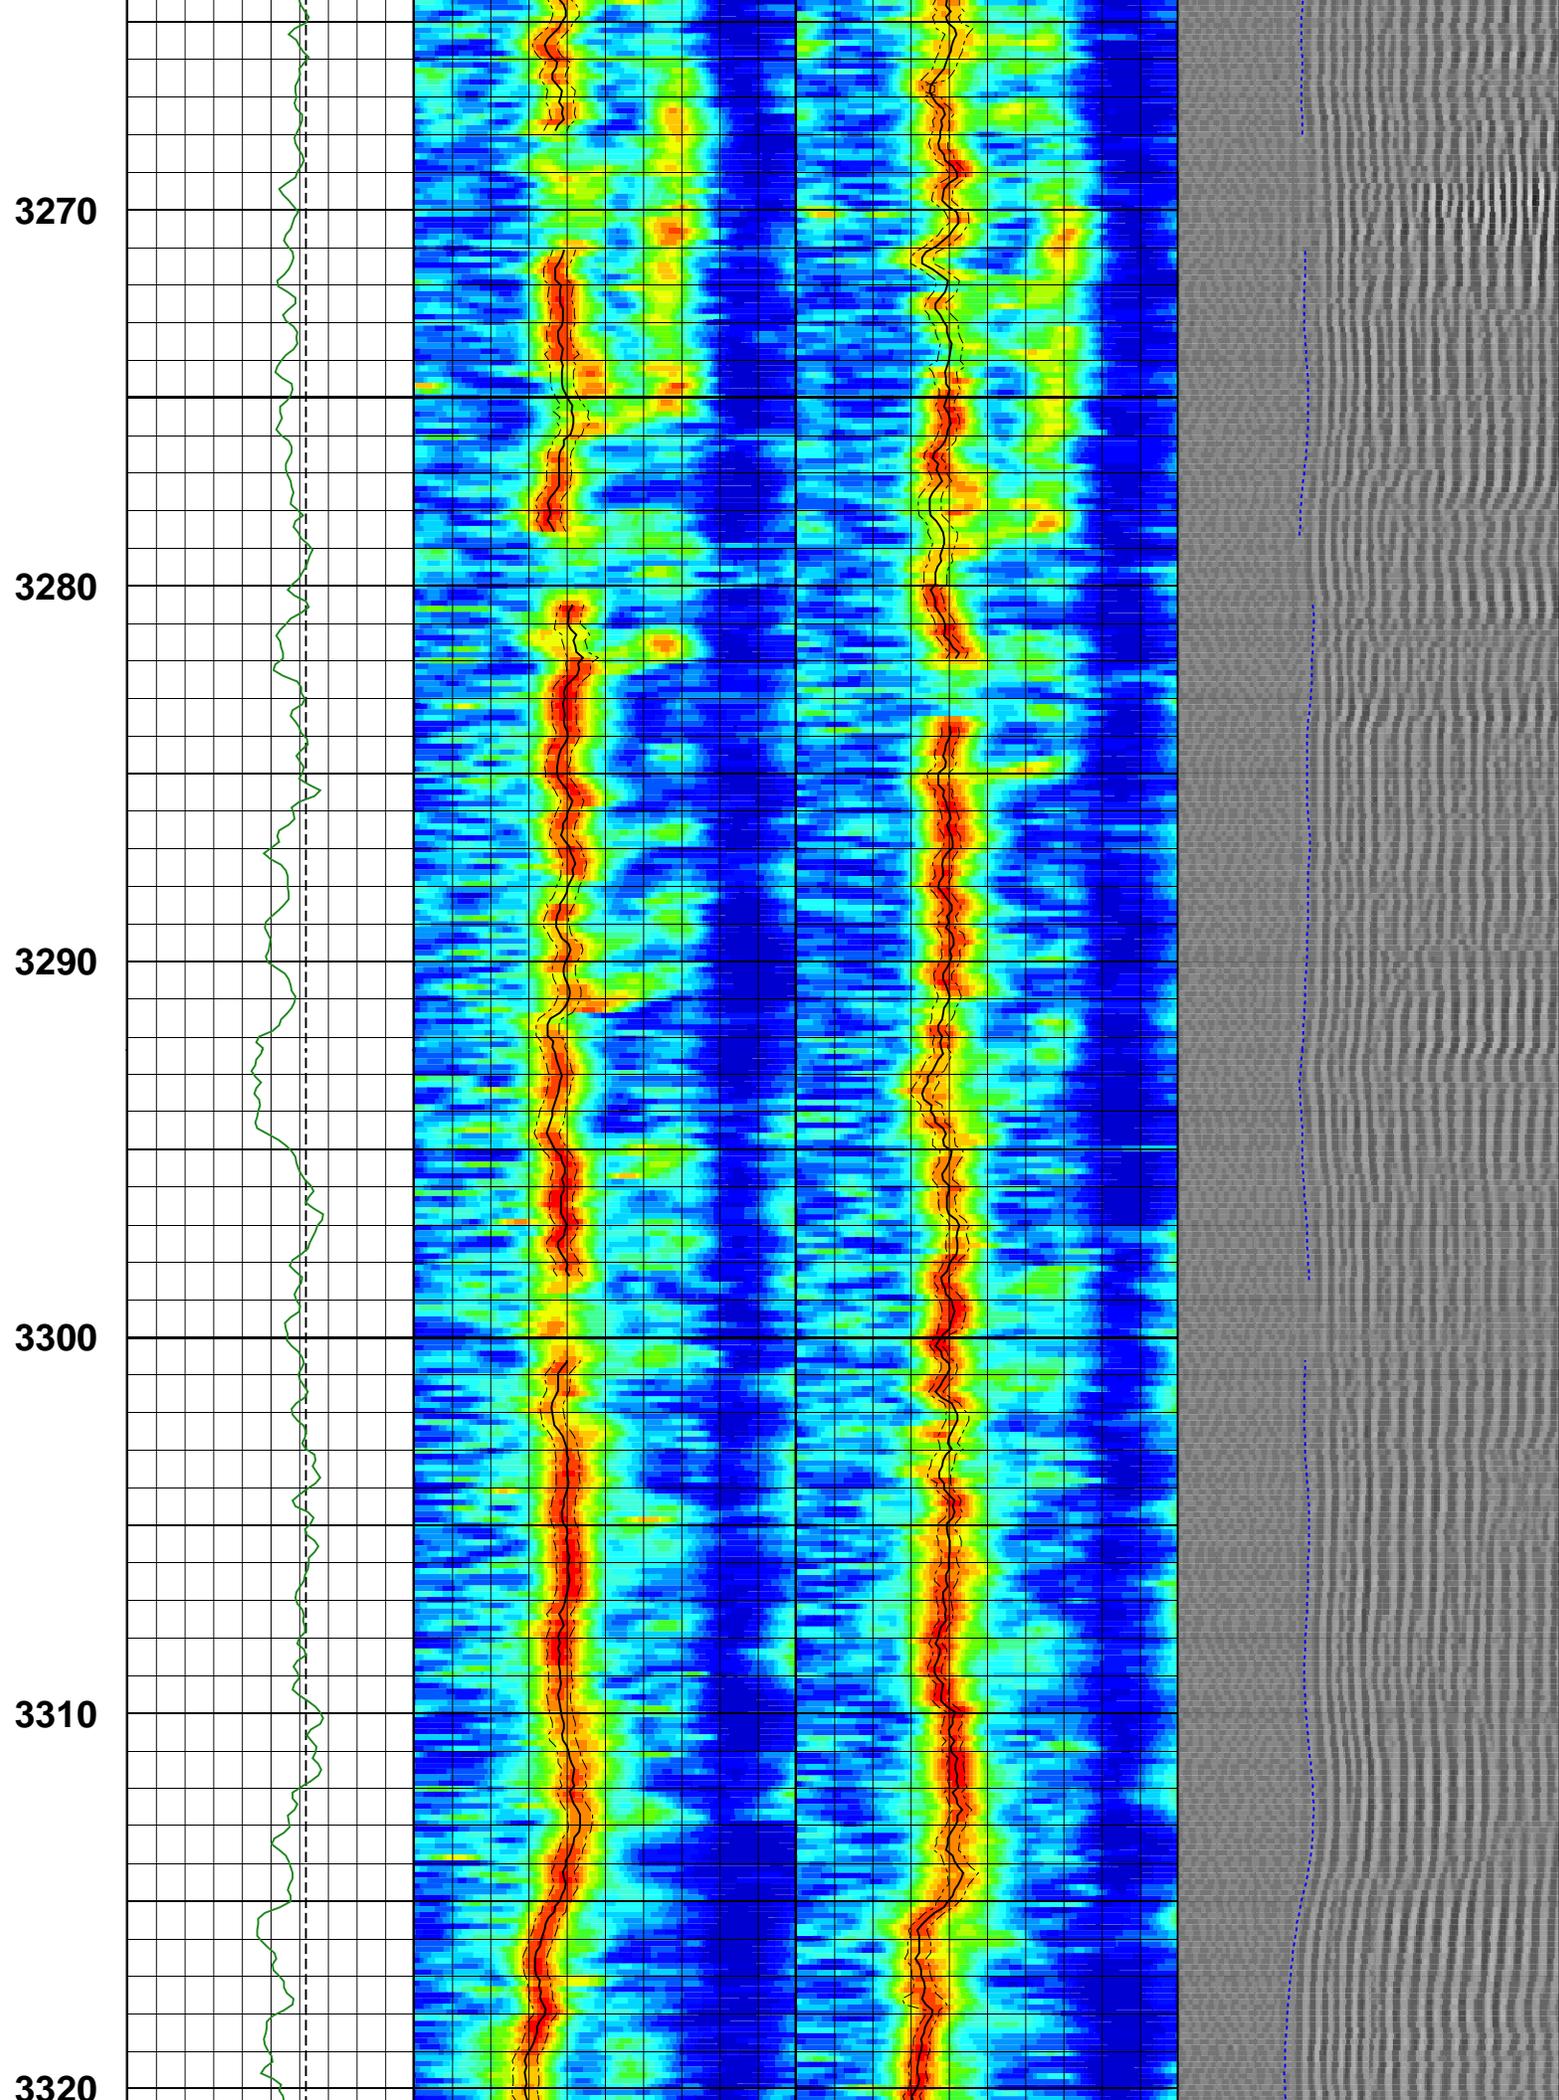

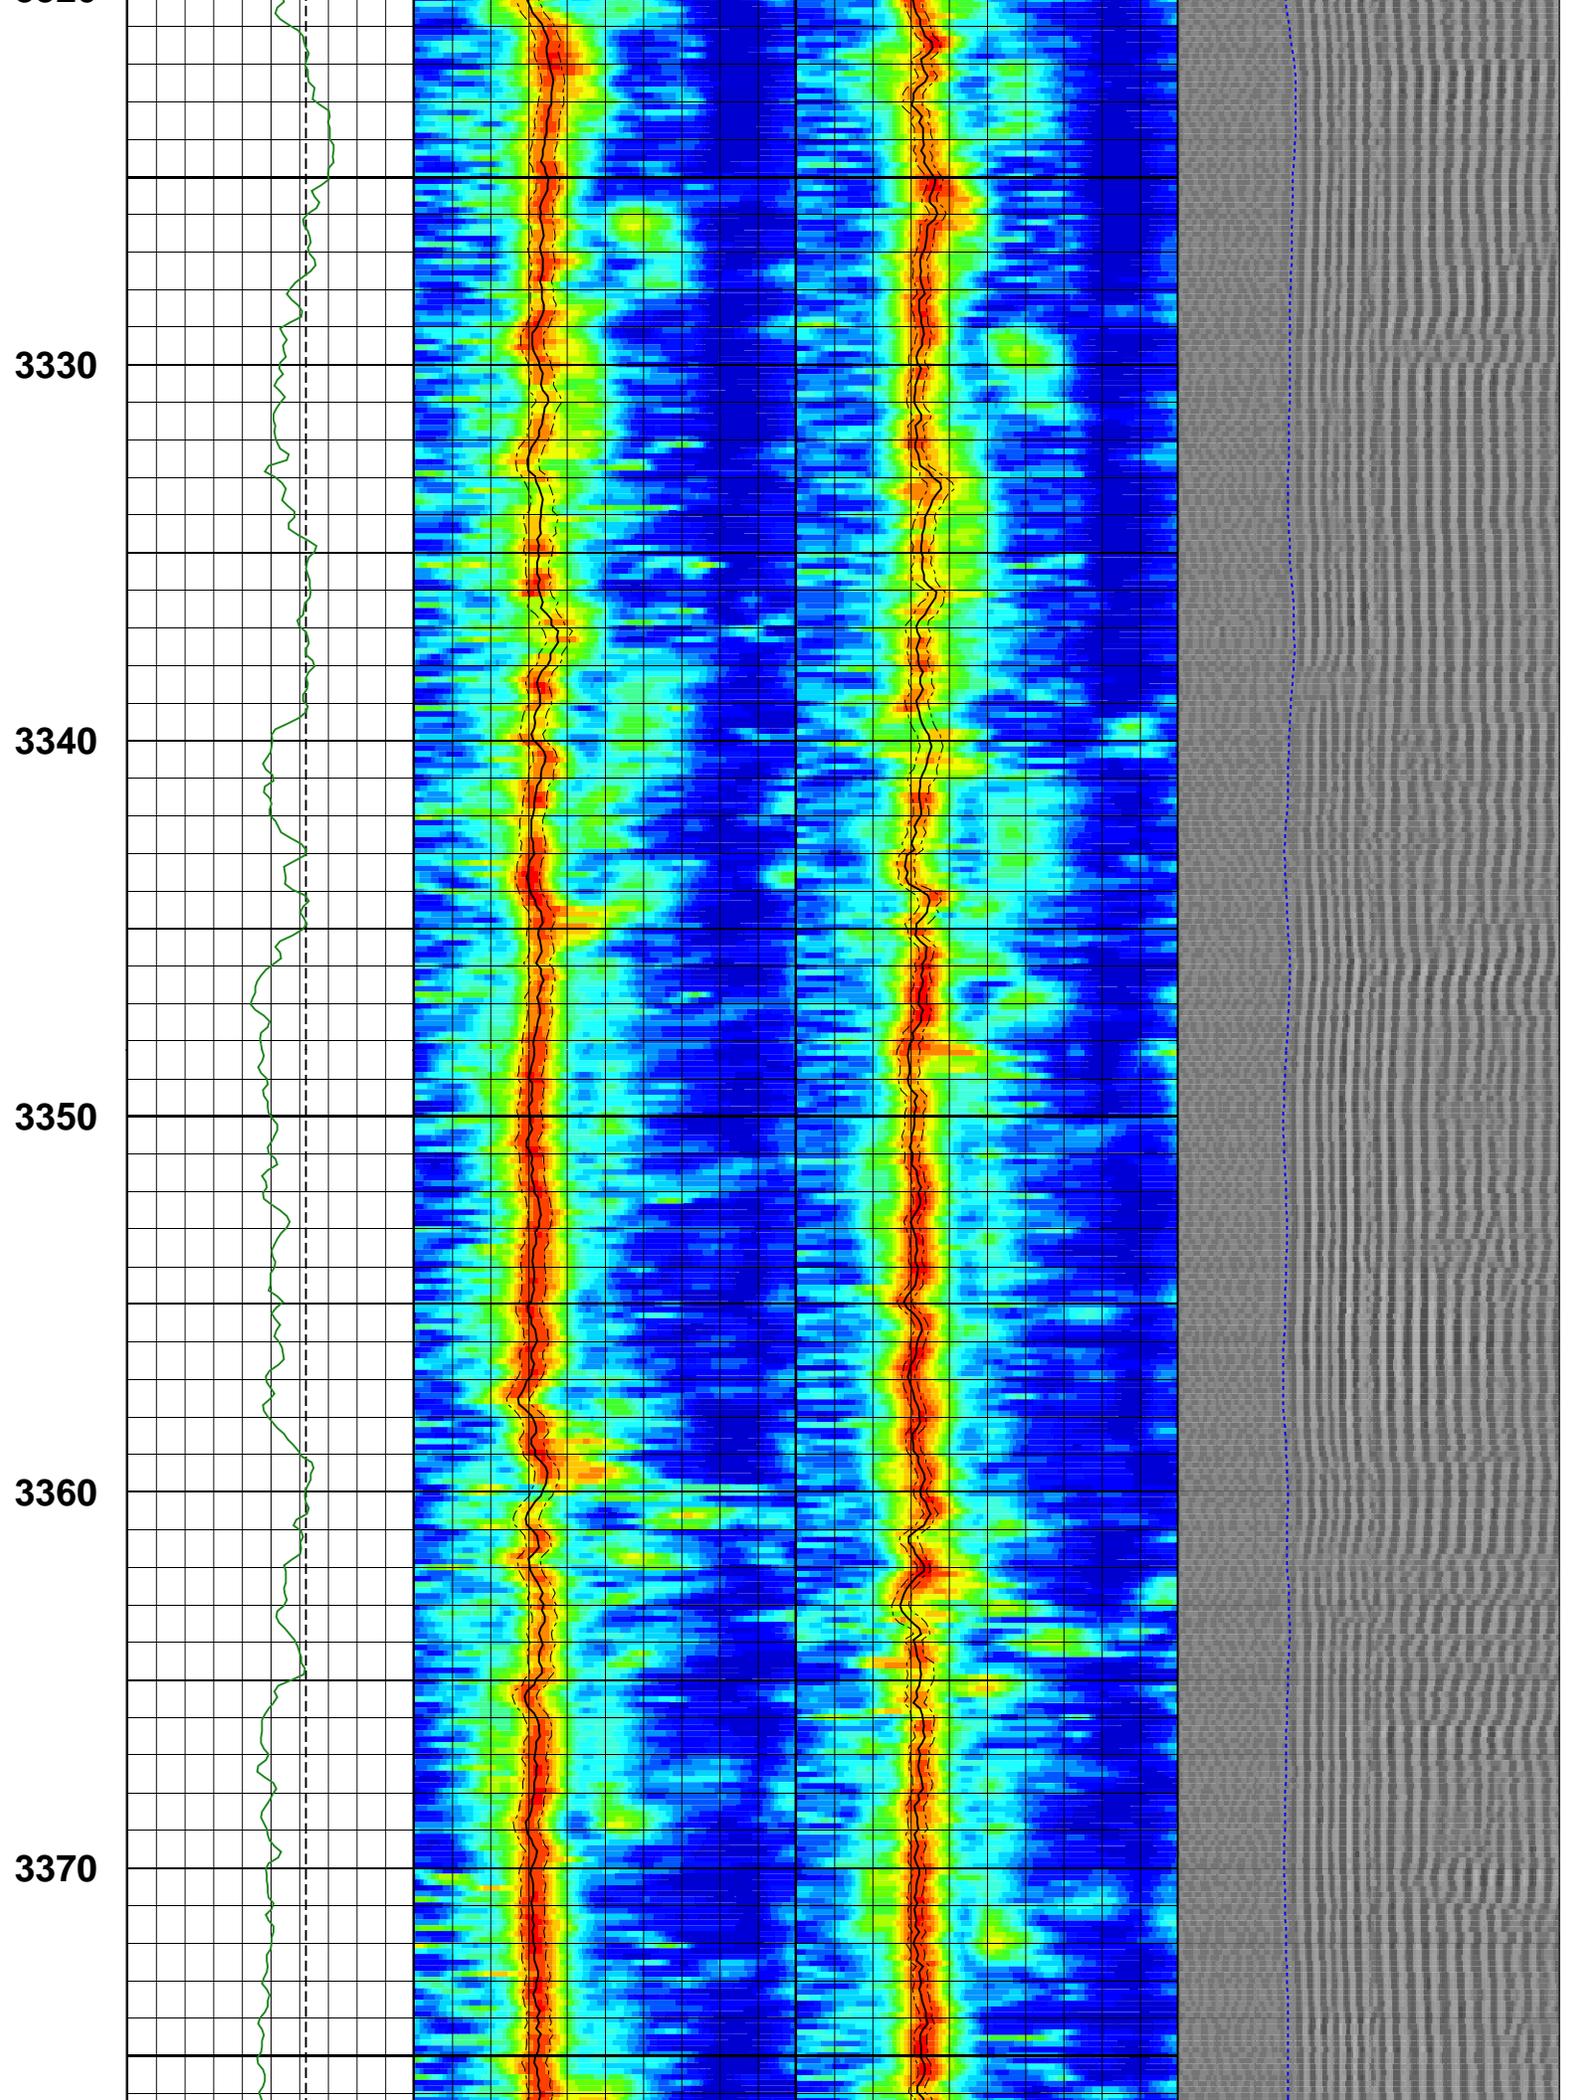

3380


3390

3400

3410

3420

3430

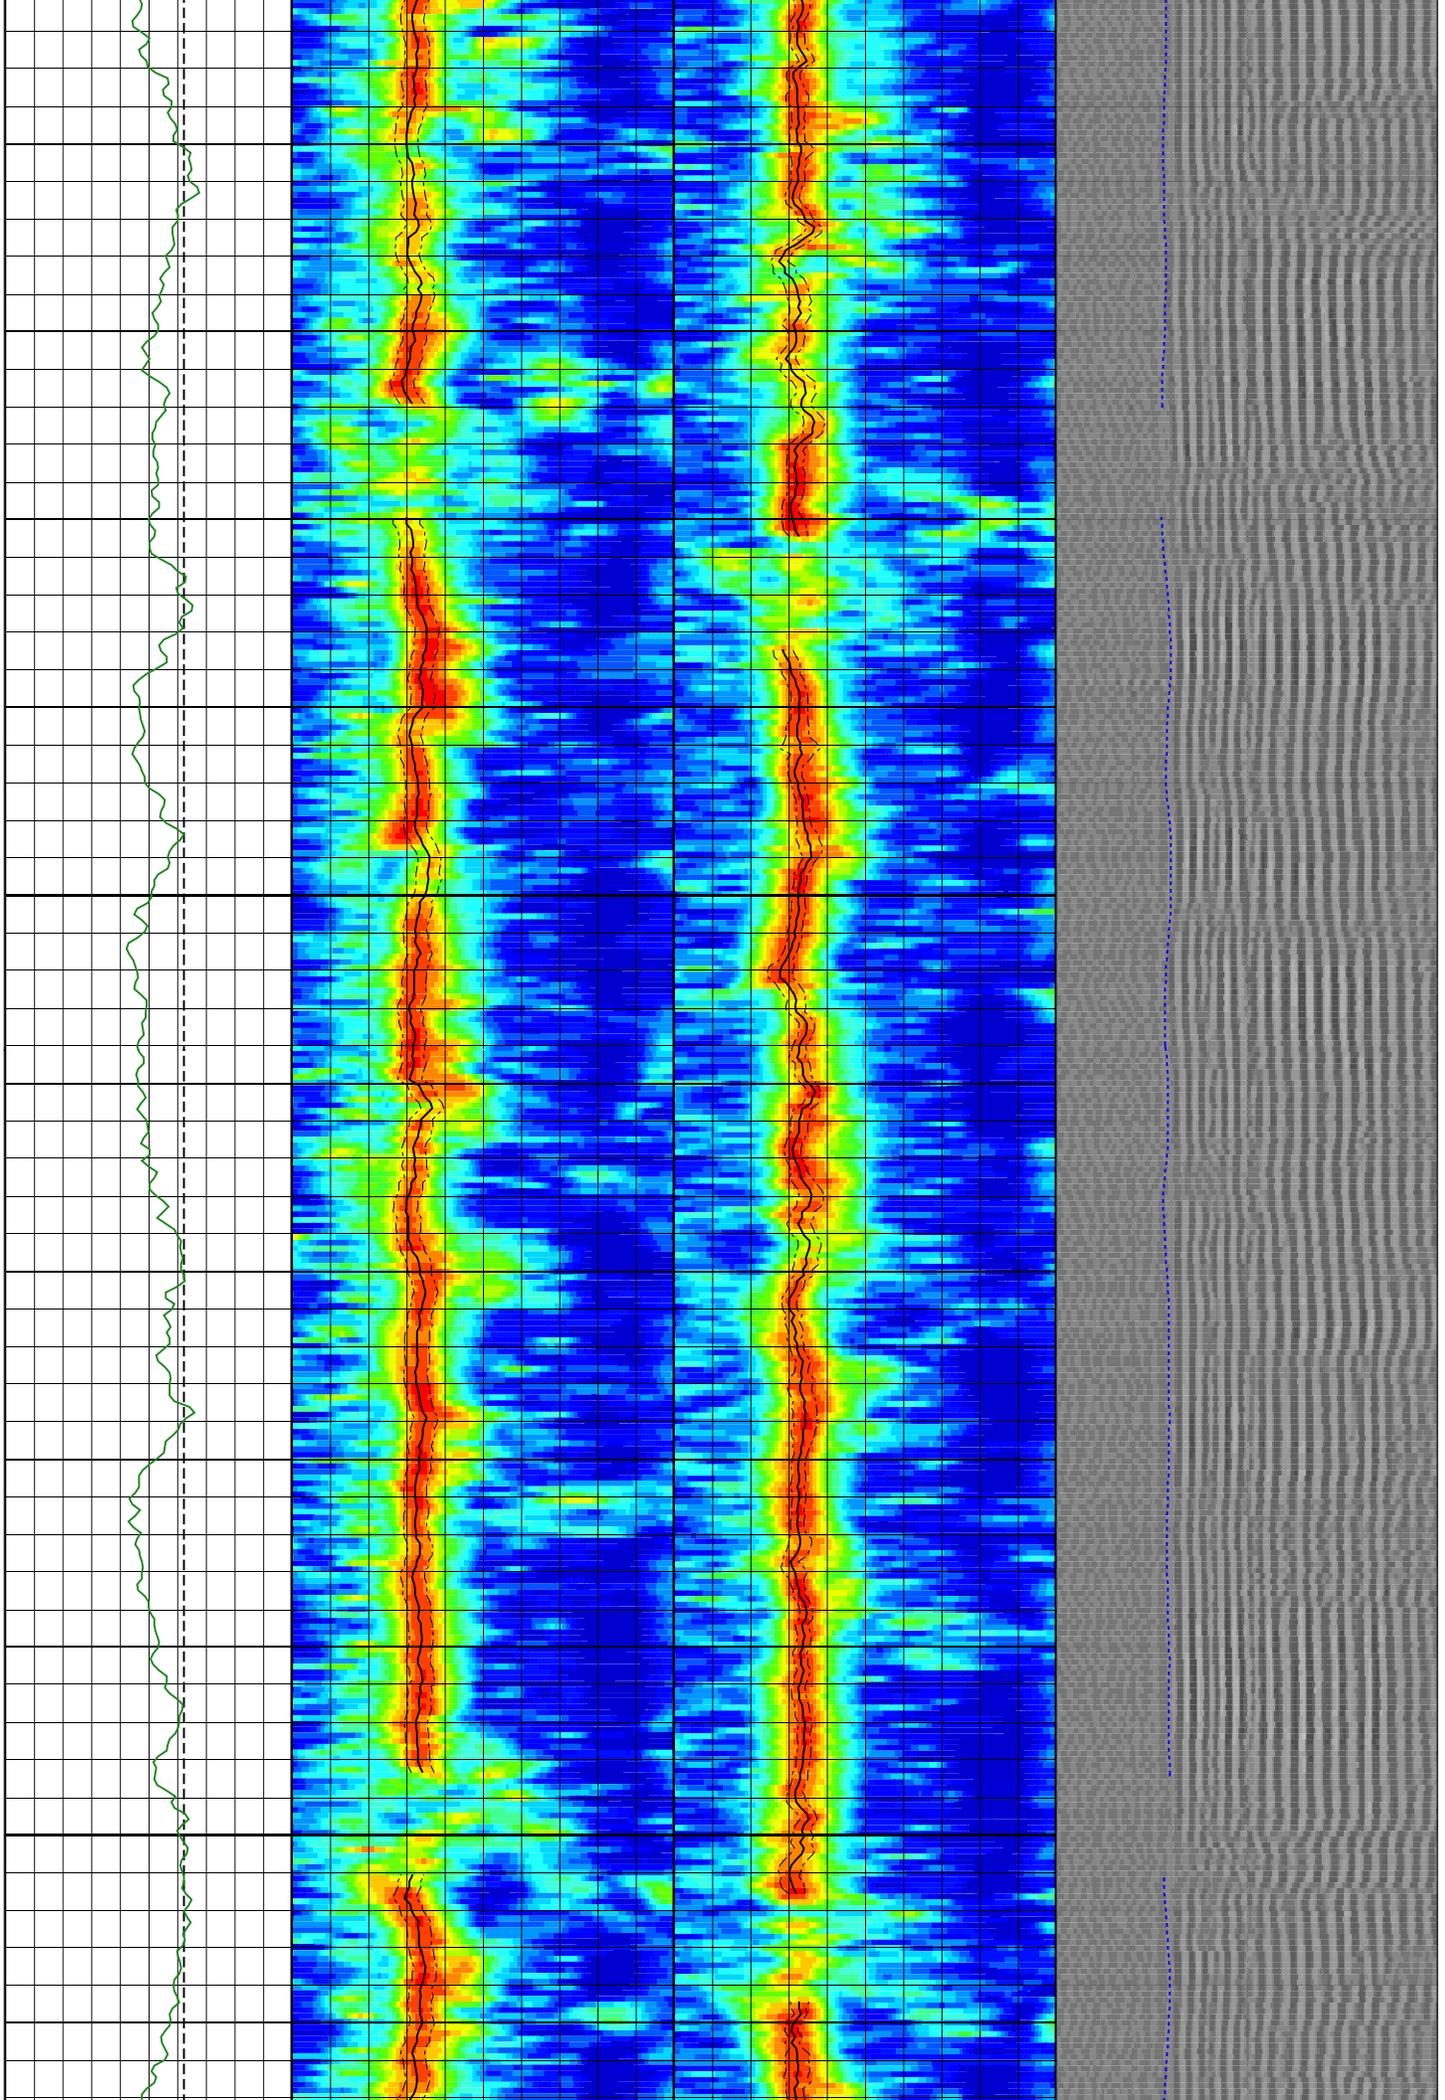


3440

3450

3460

3470

3480

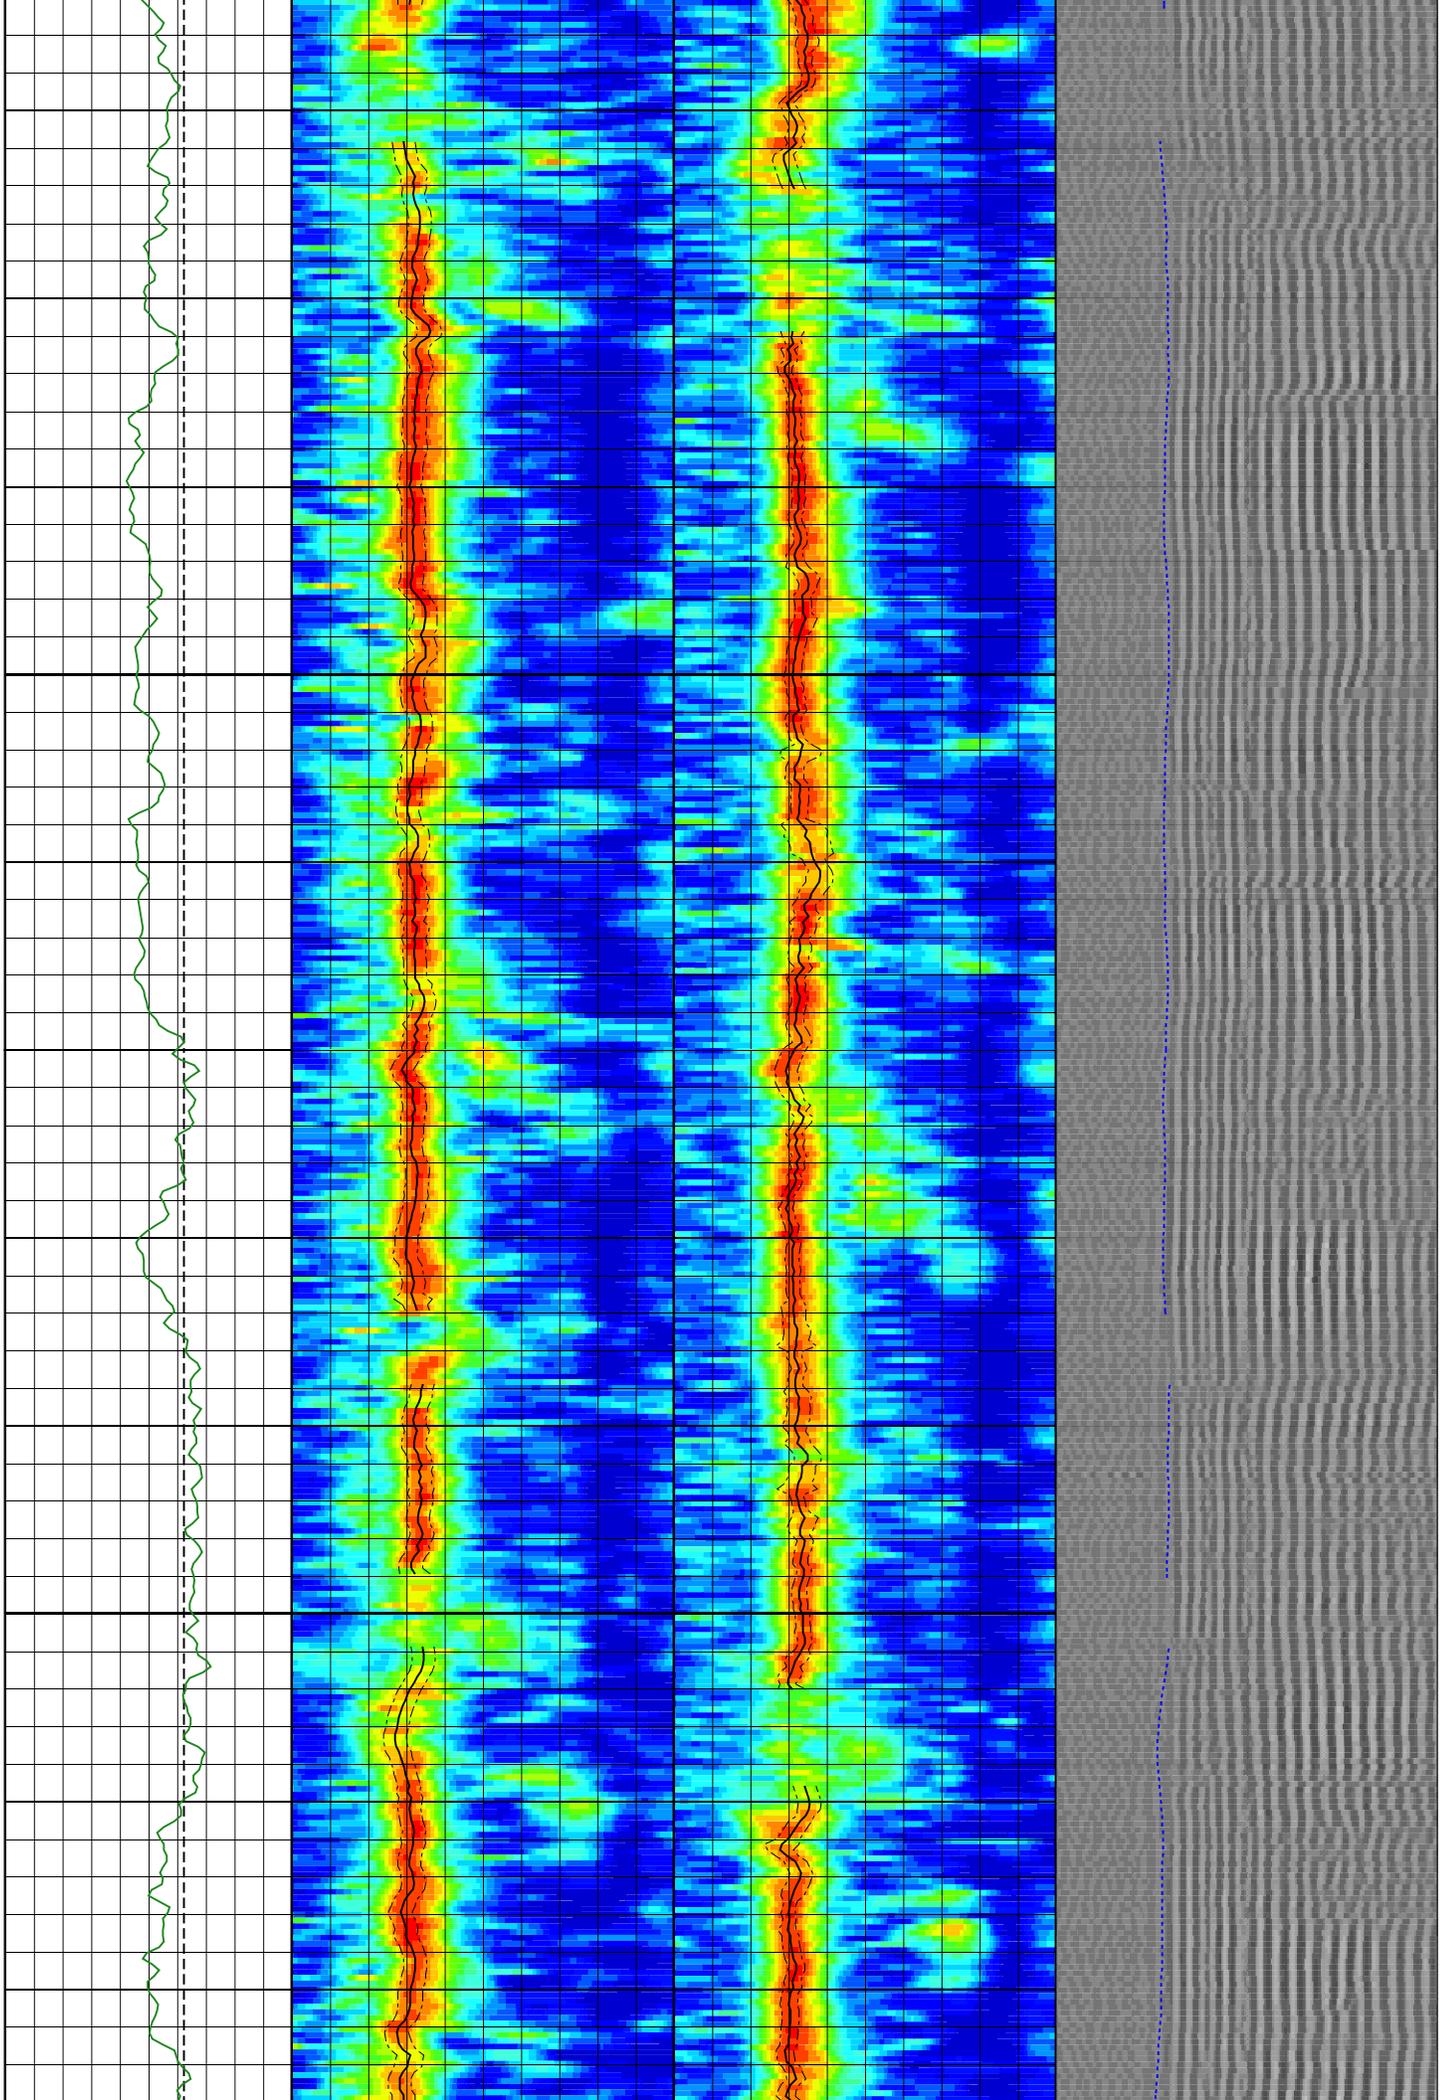

3490


3500


3510

3520

3530

3540

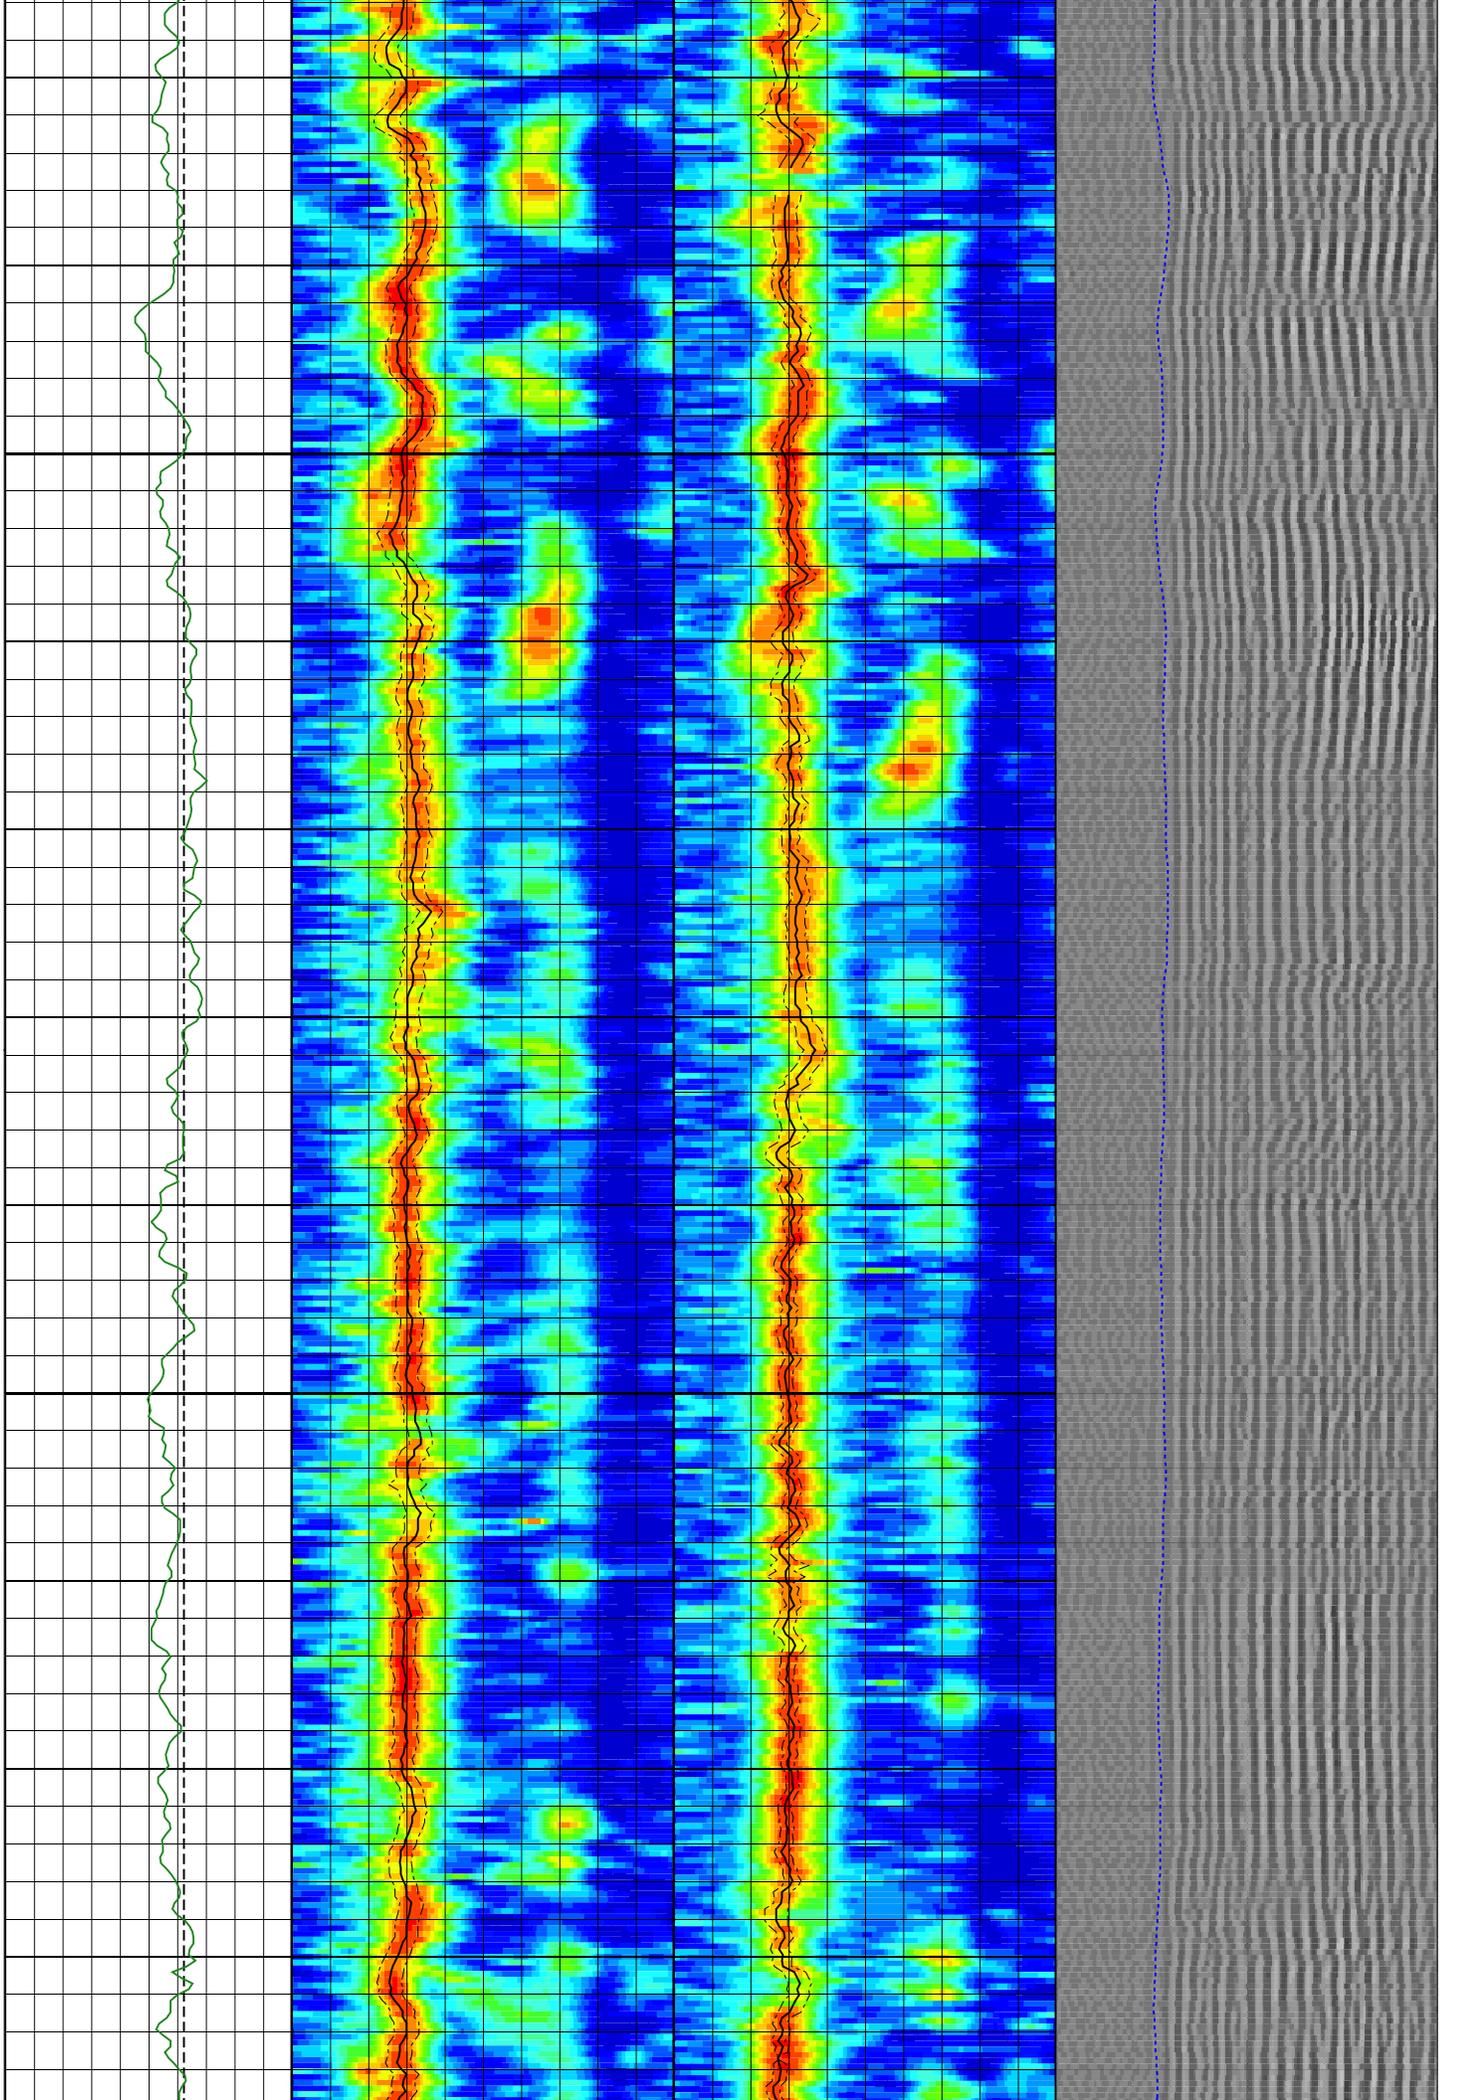

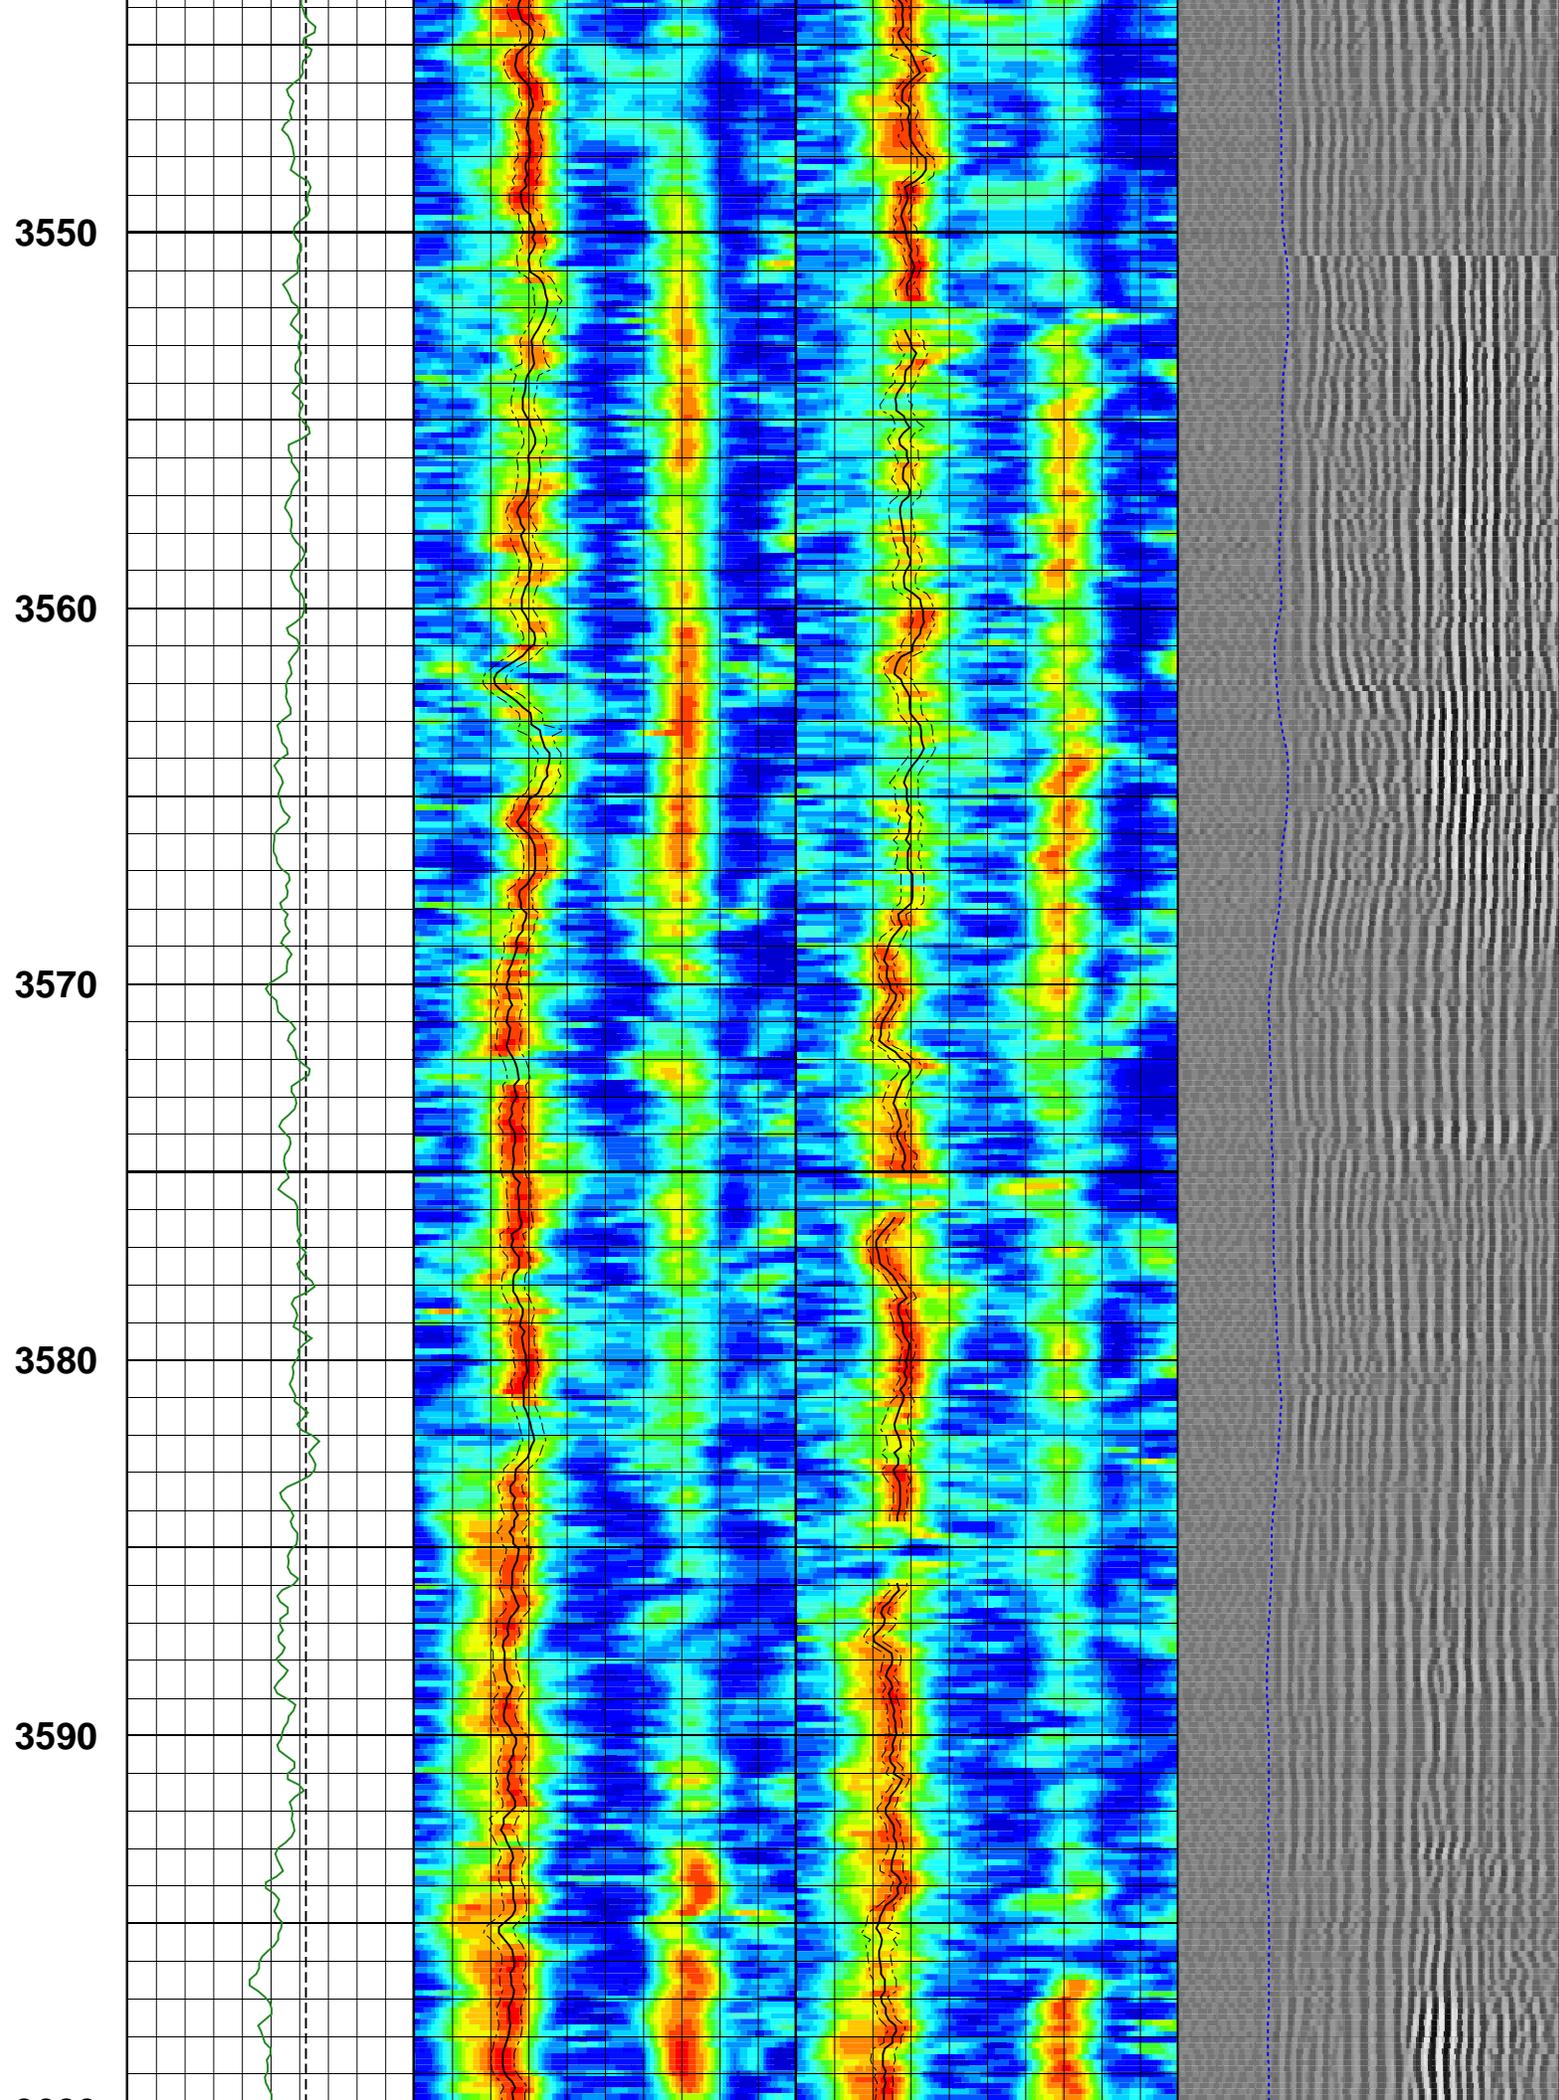

3600


3610

3620

3630

3640

3650

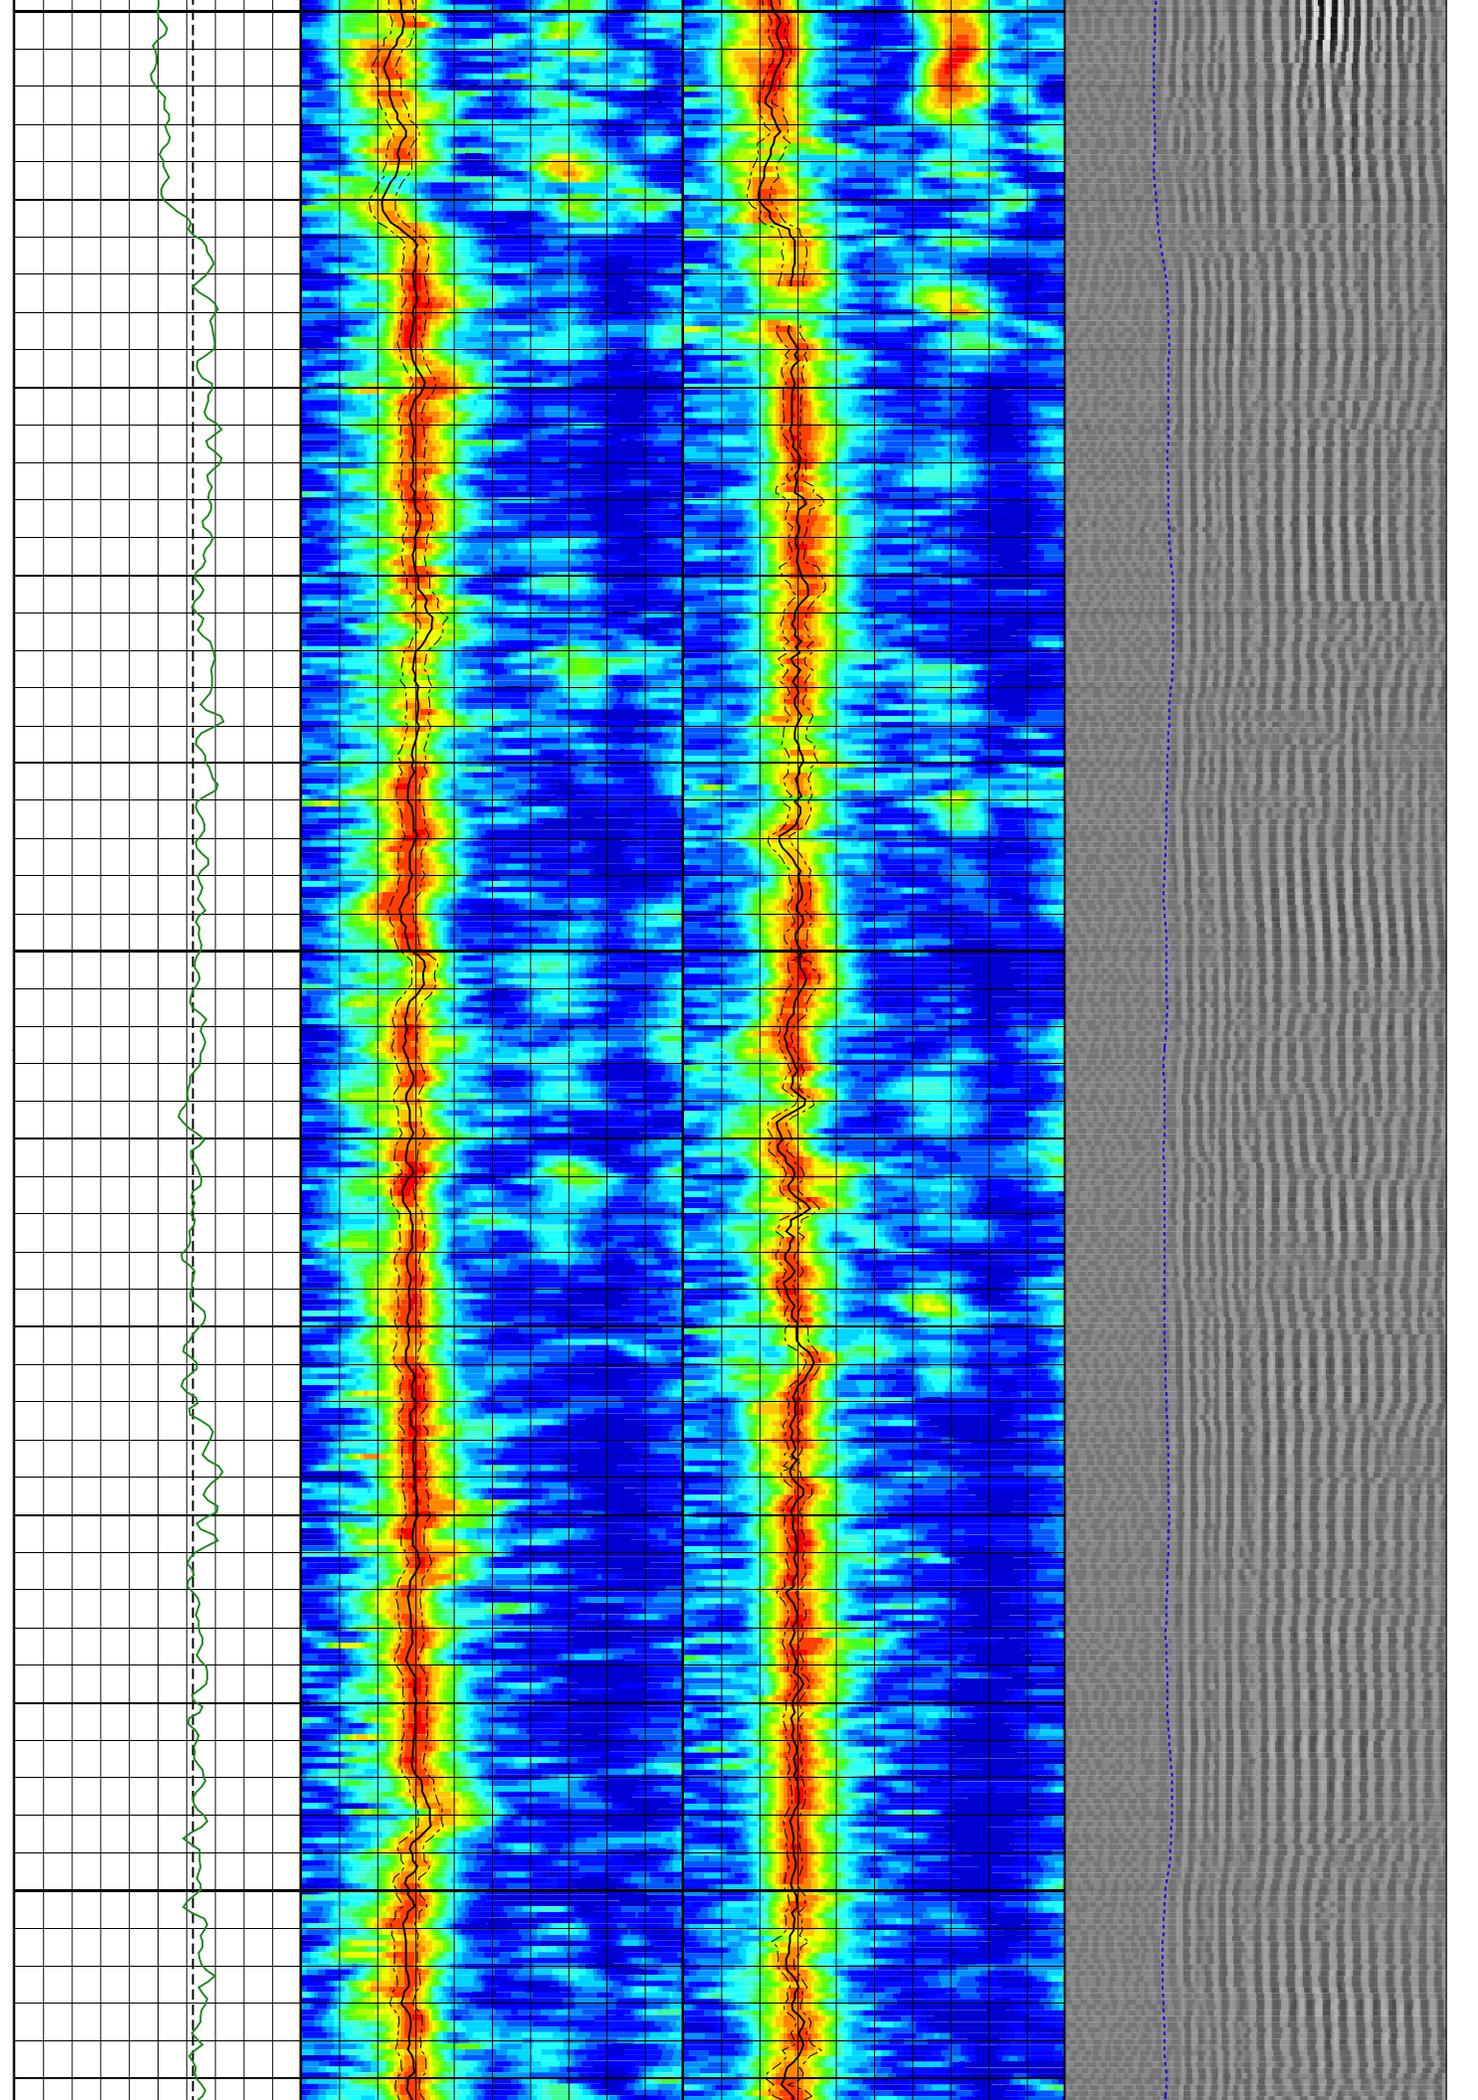

3660


3670

3680

3690

3700

3710

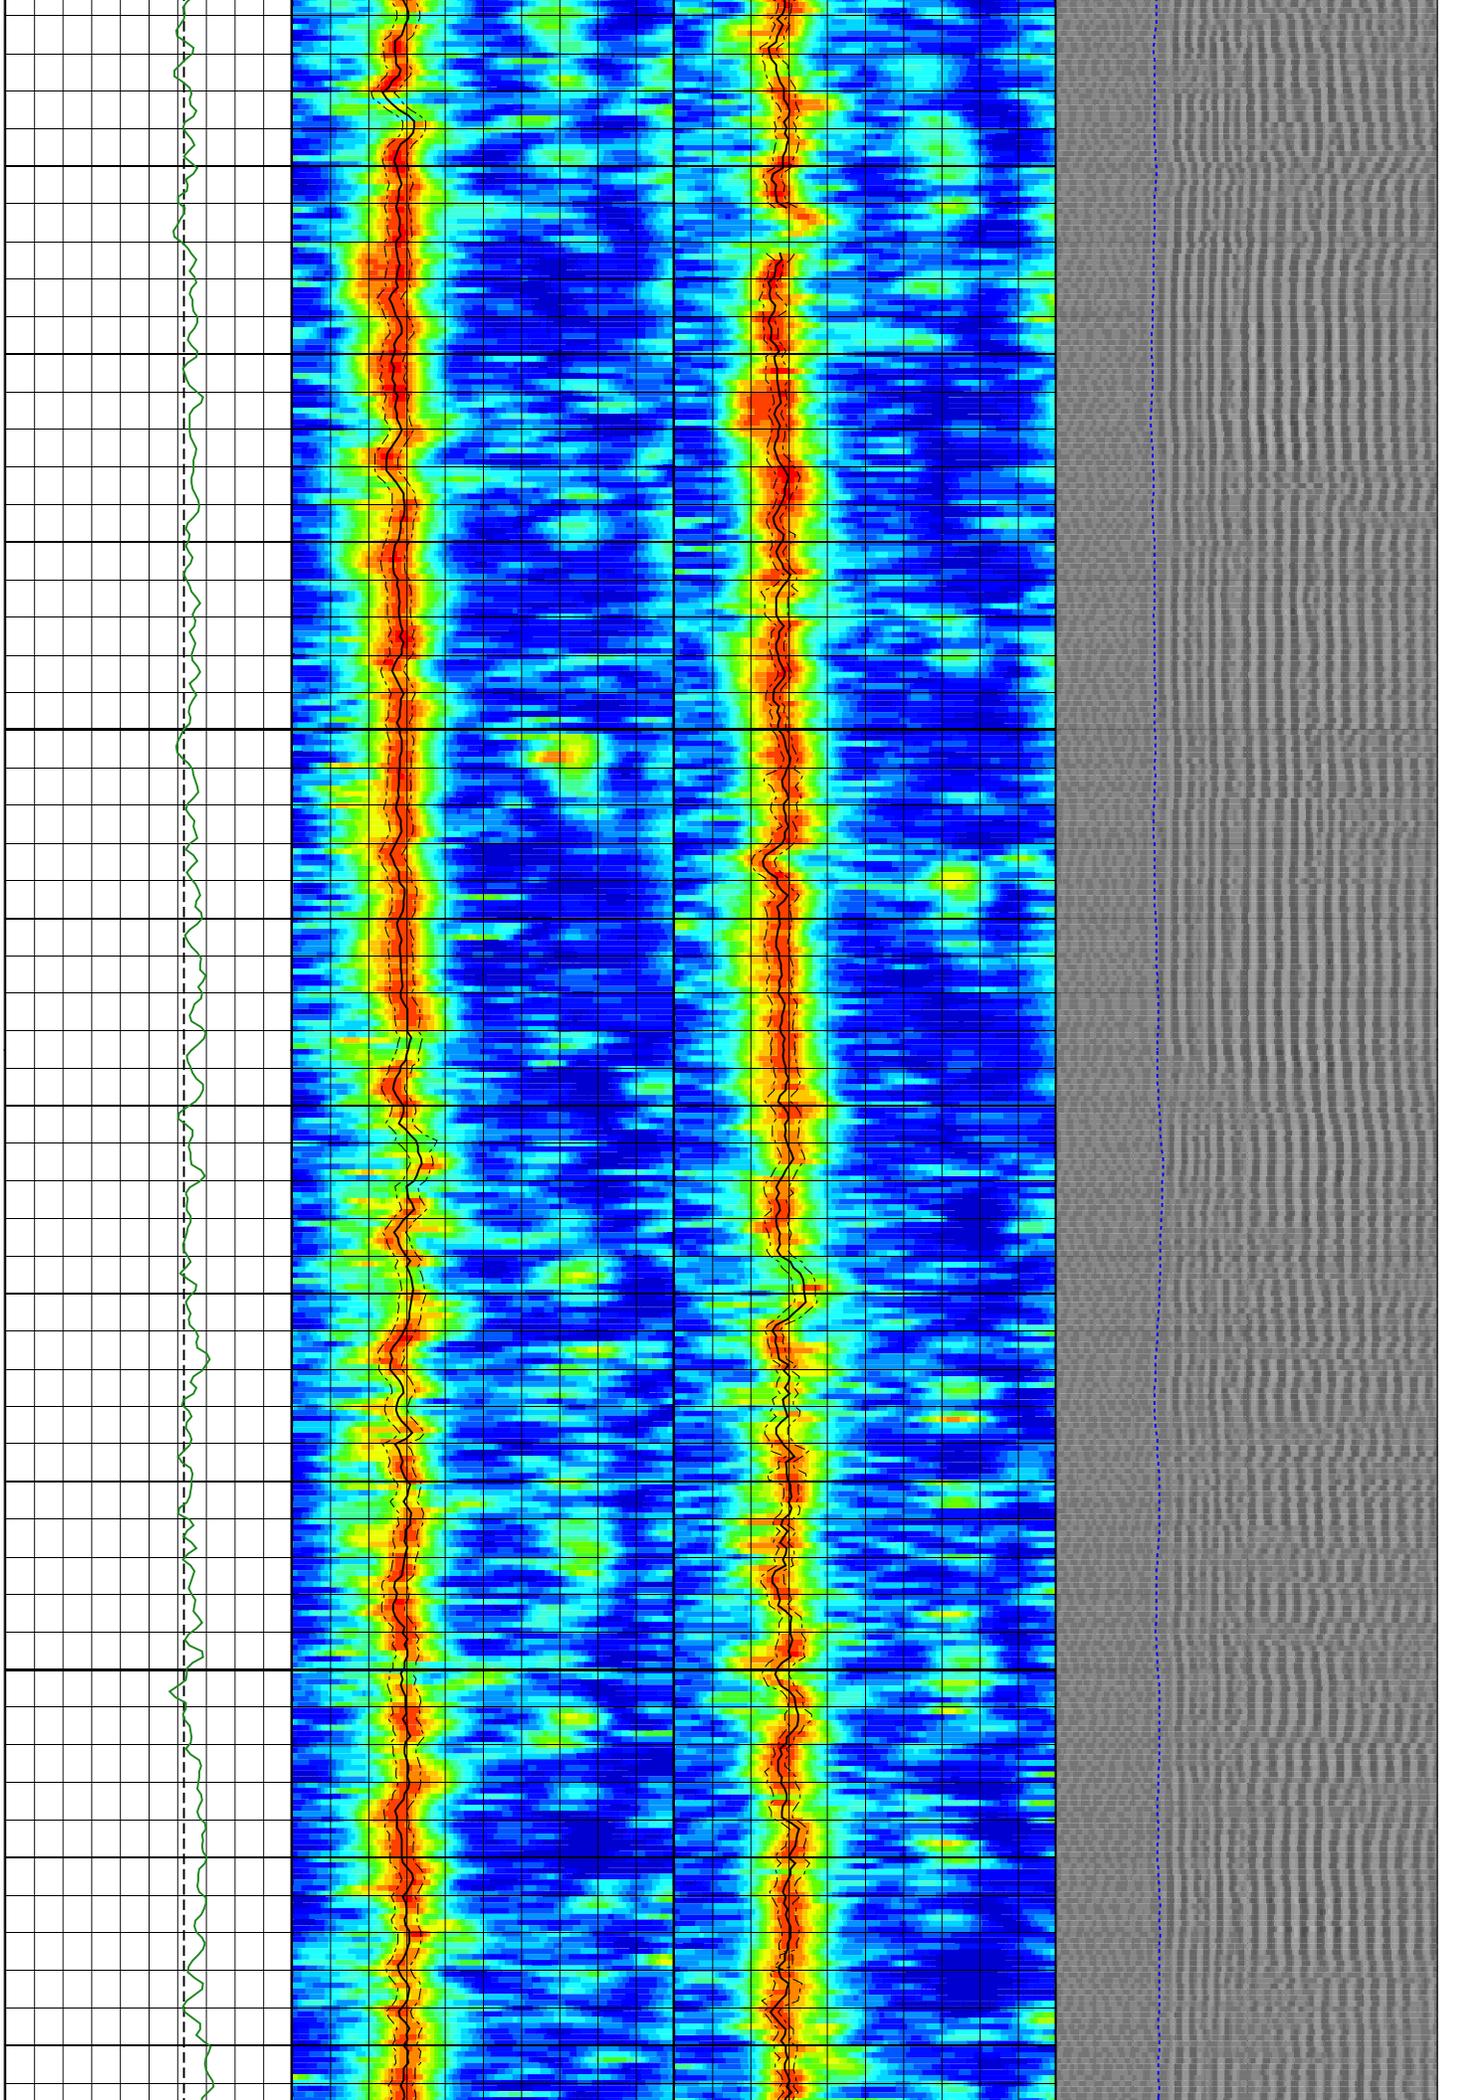


3720

3730

3740

3750

3760

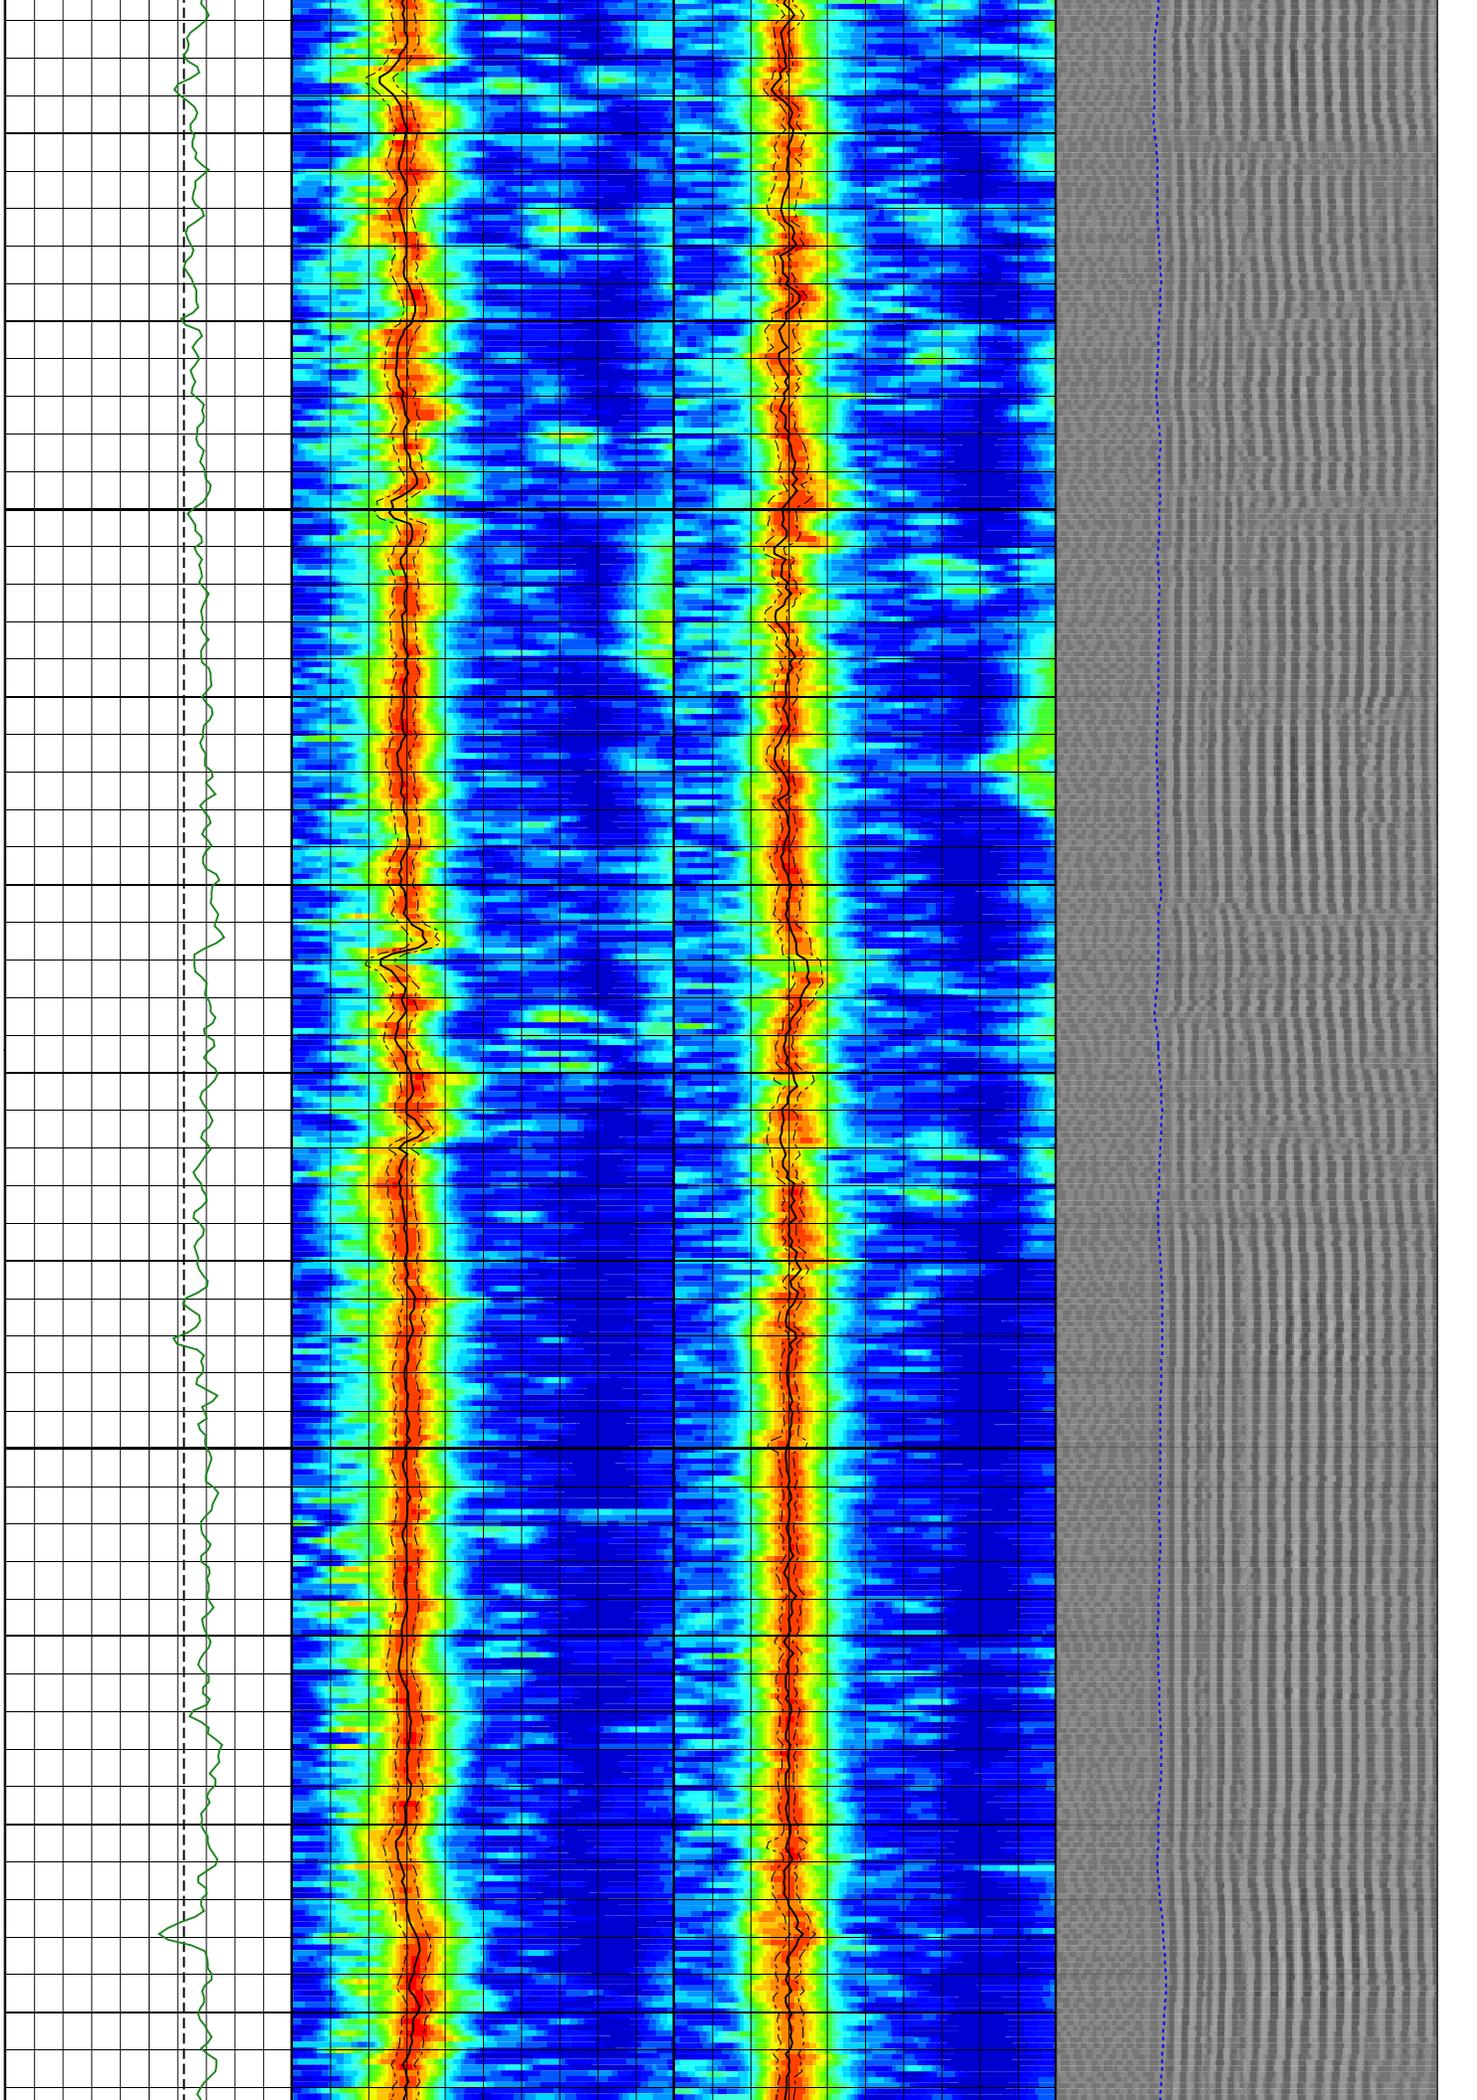

3770


3780

3790

3800

3810

3820

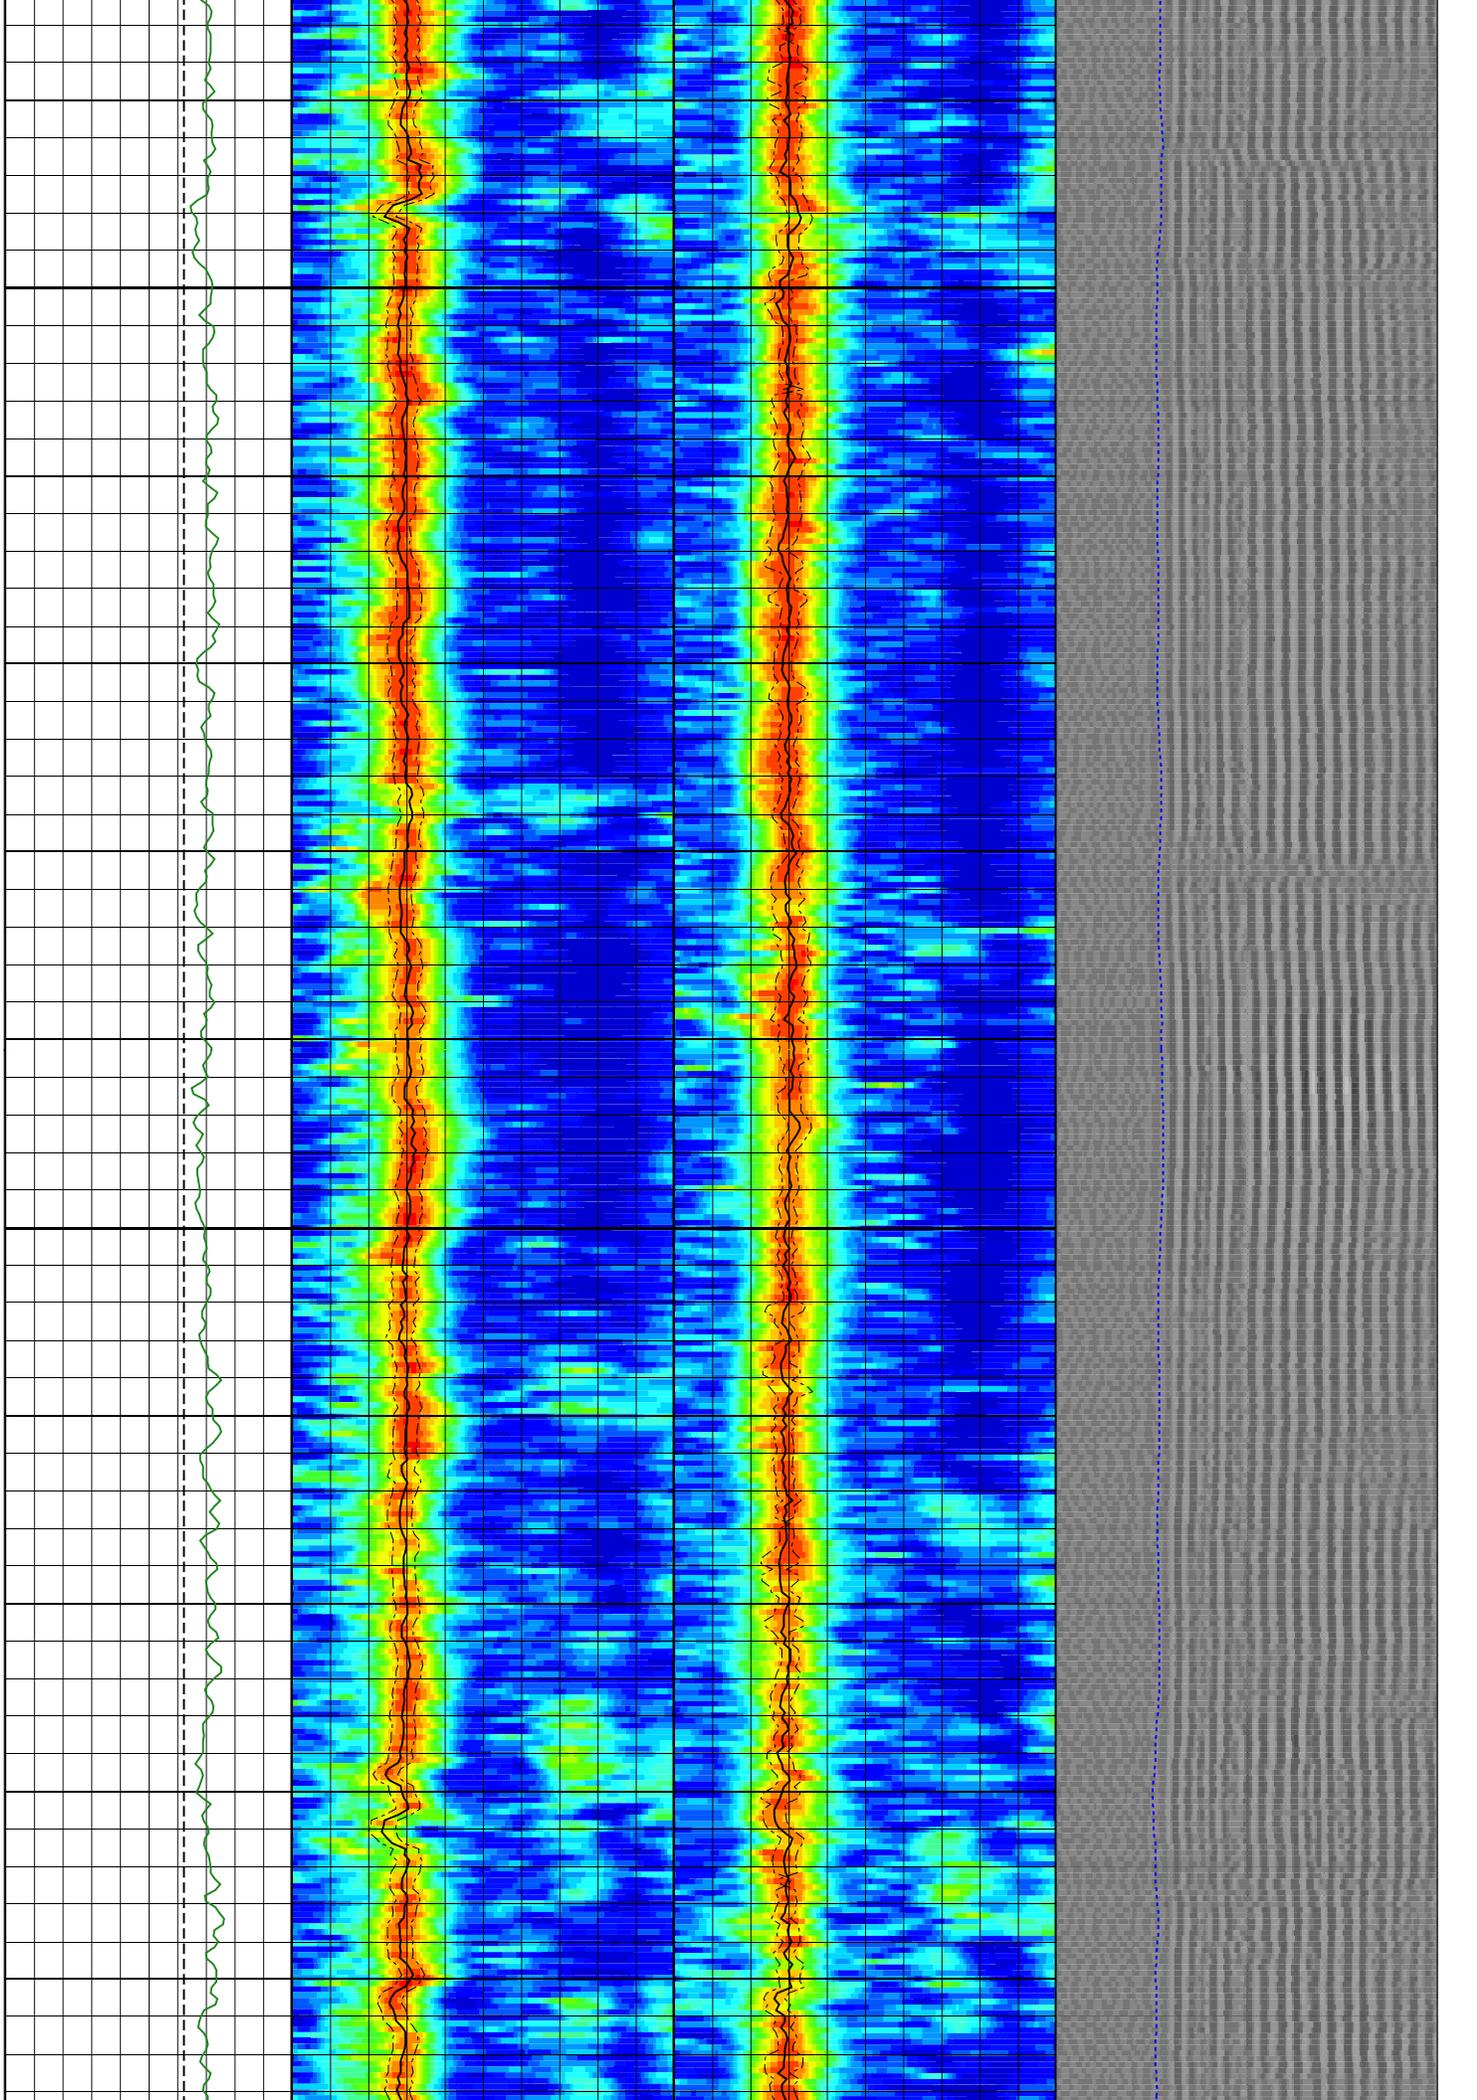


3830

3840

3850

3860

3870

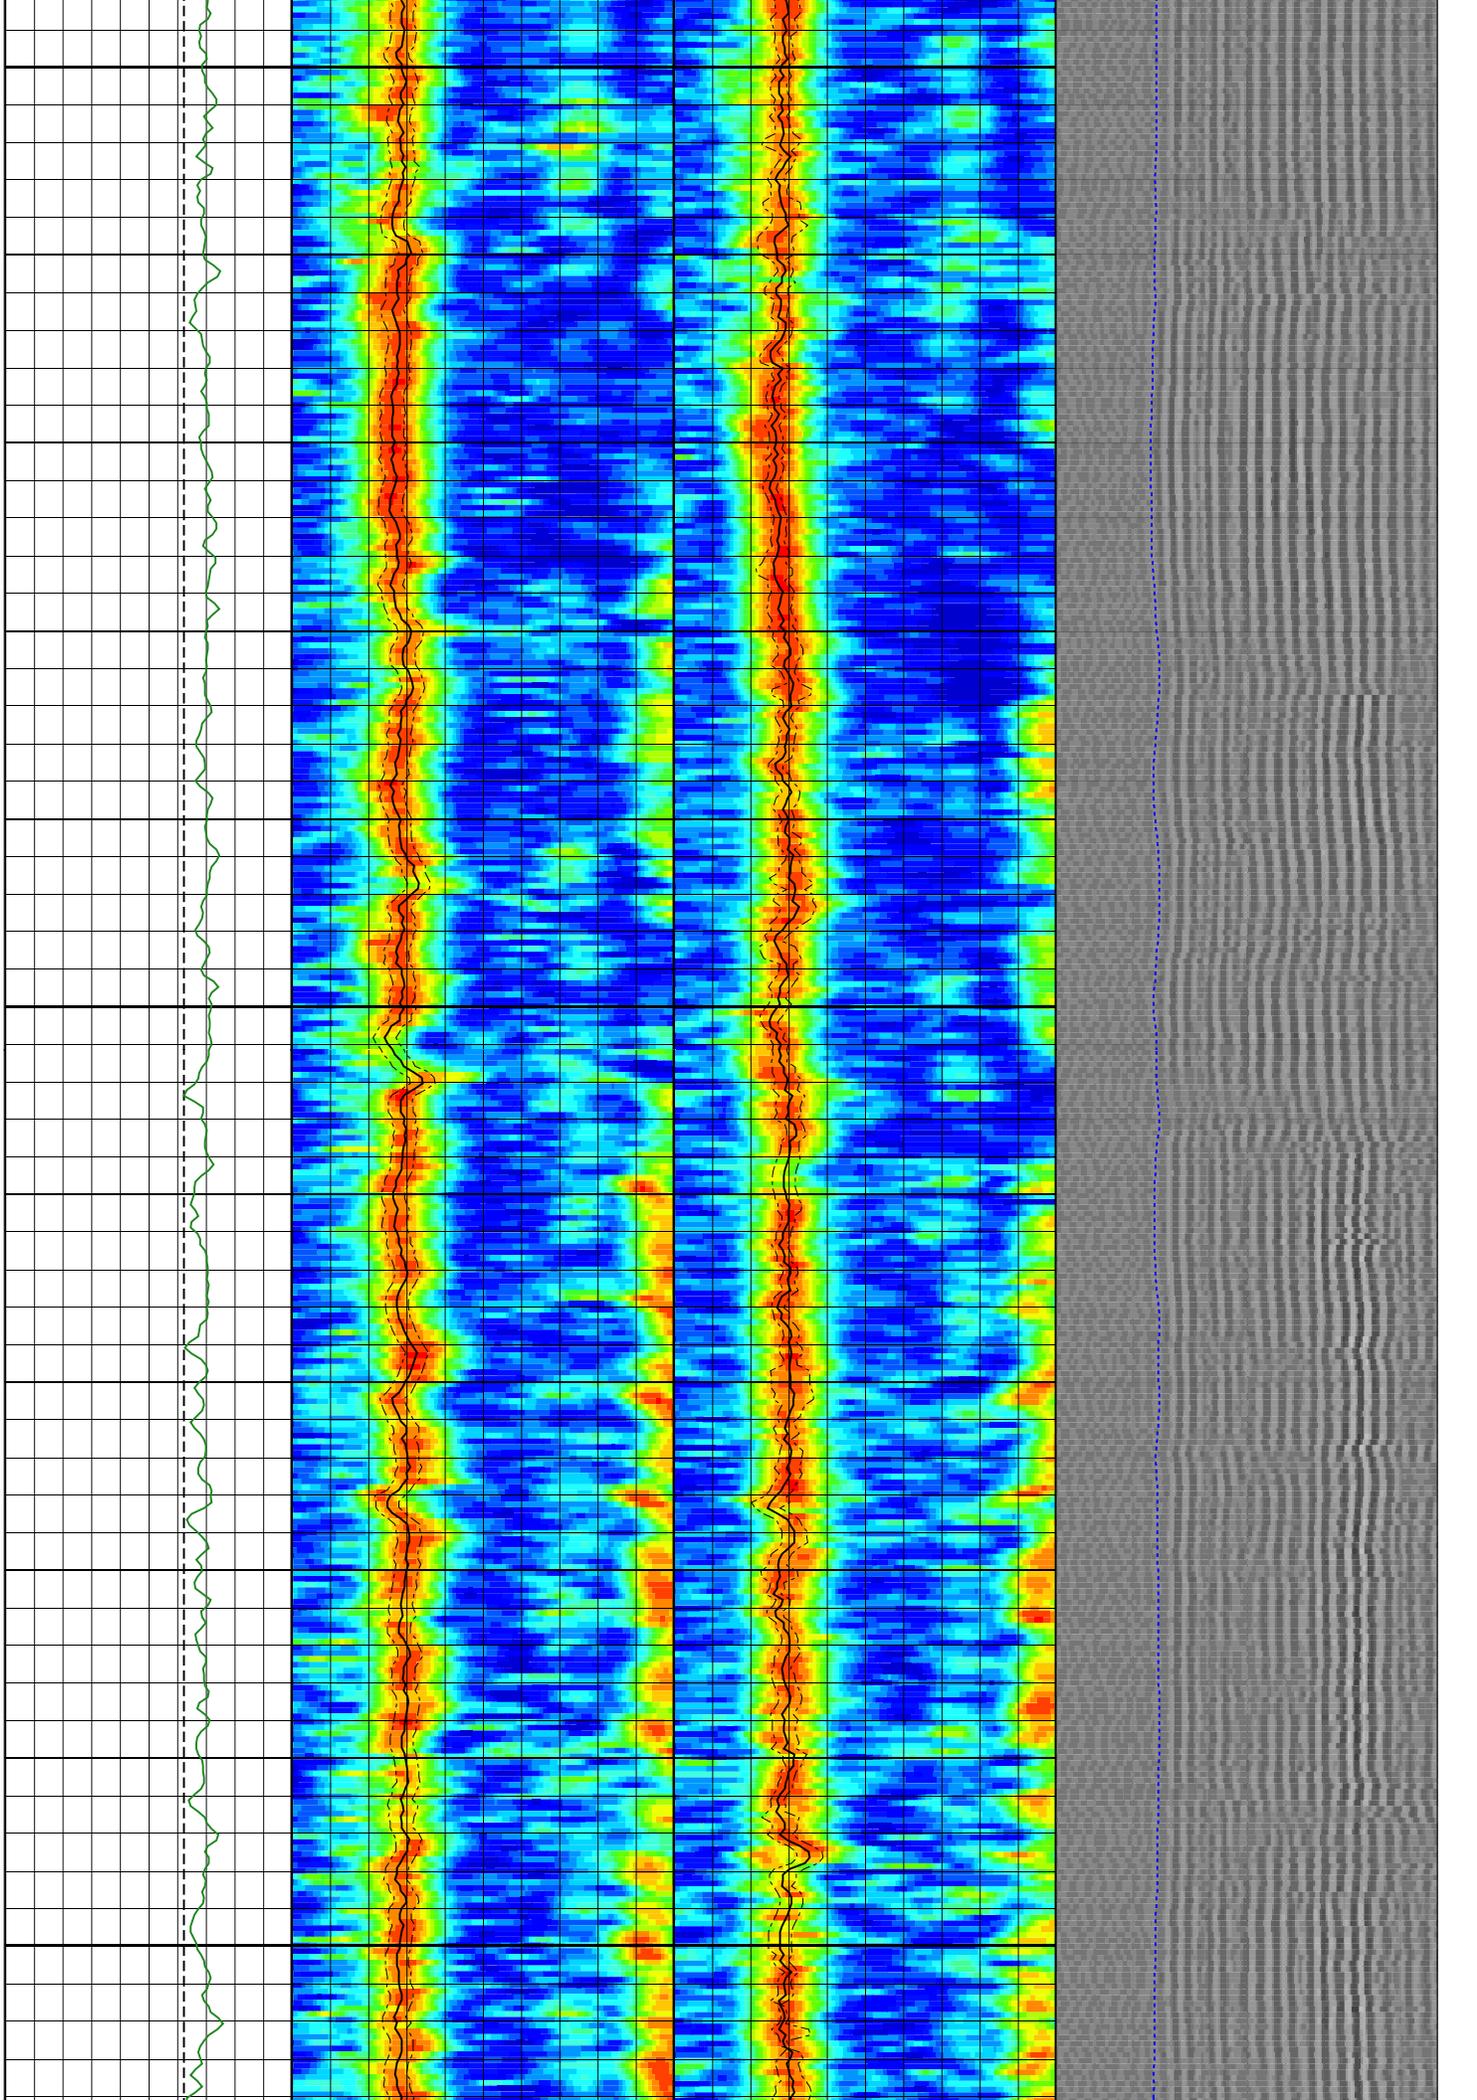

3880


3890


3900

3910

3920

3930

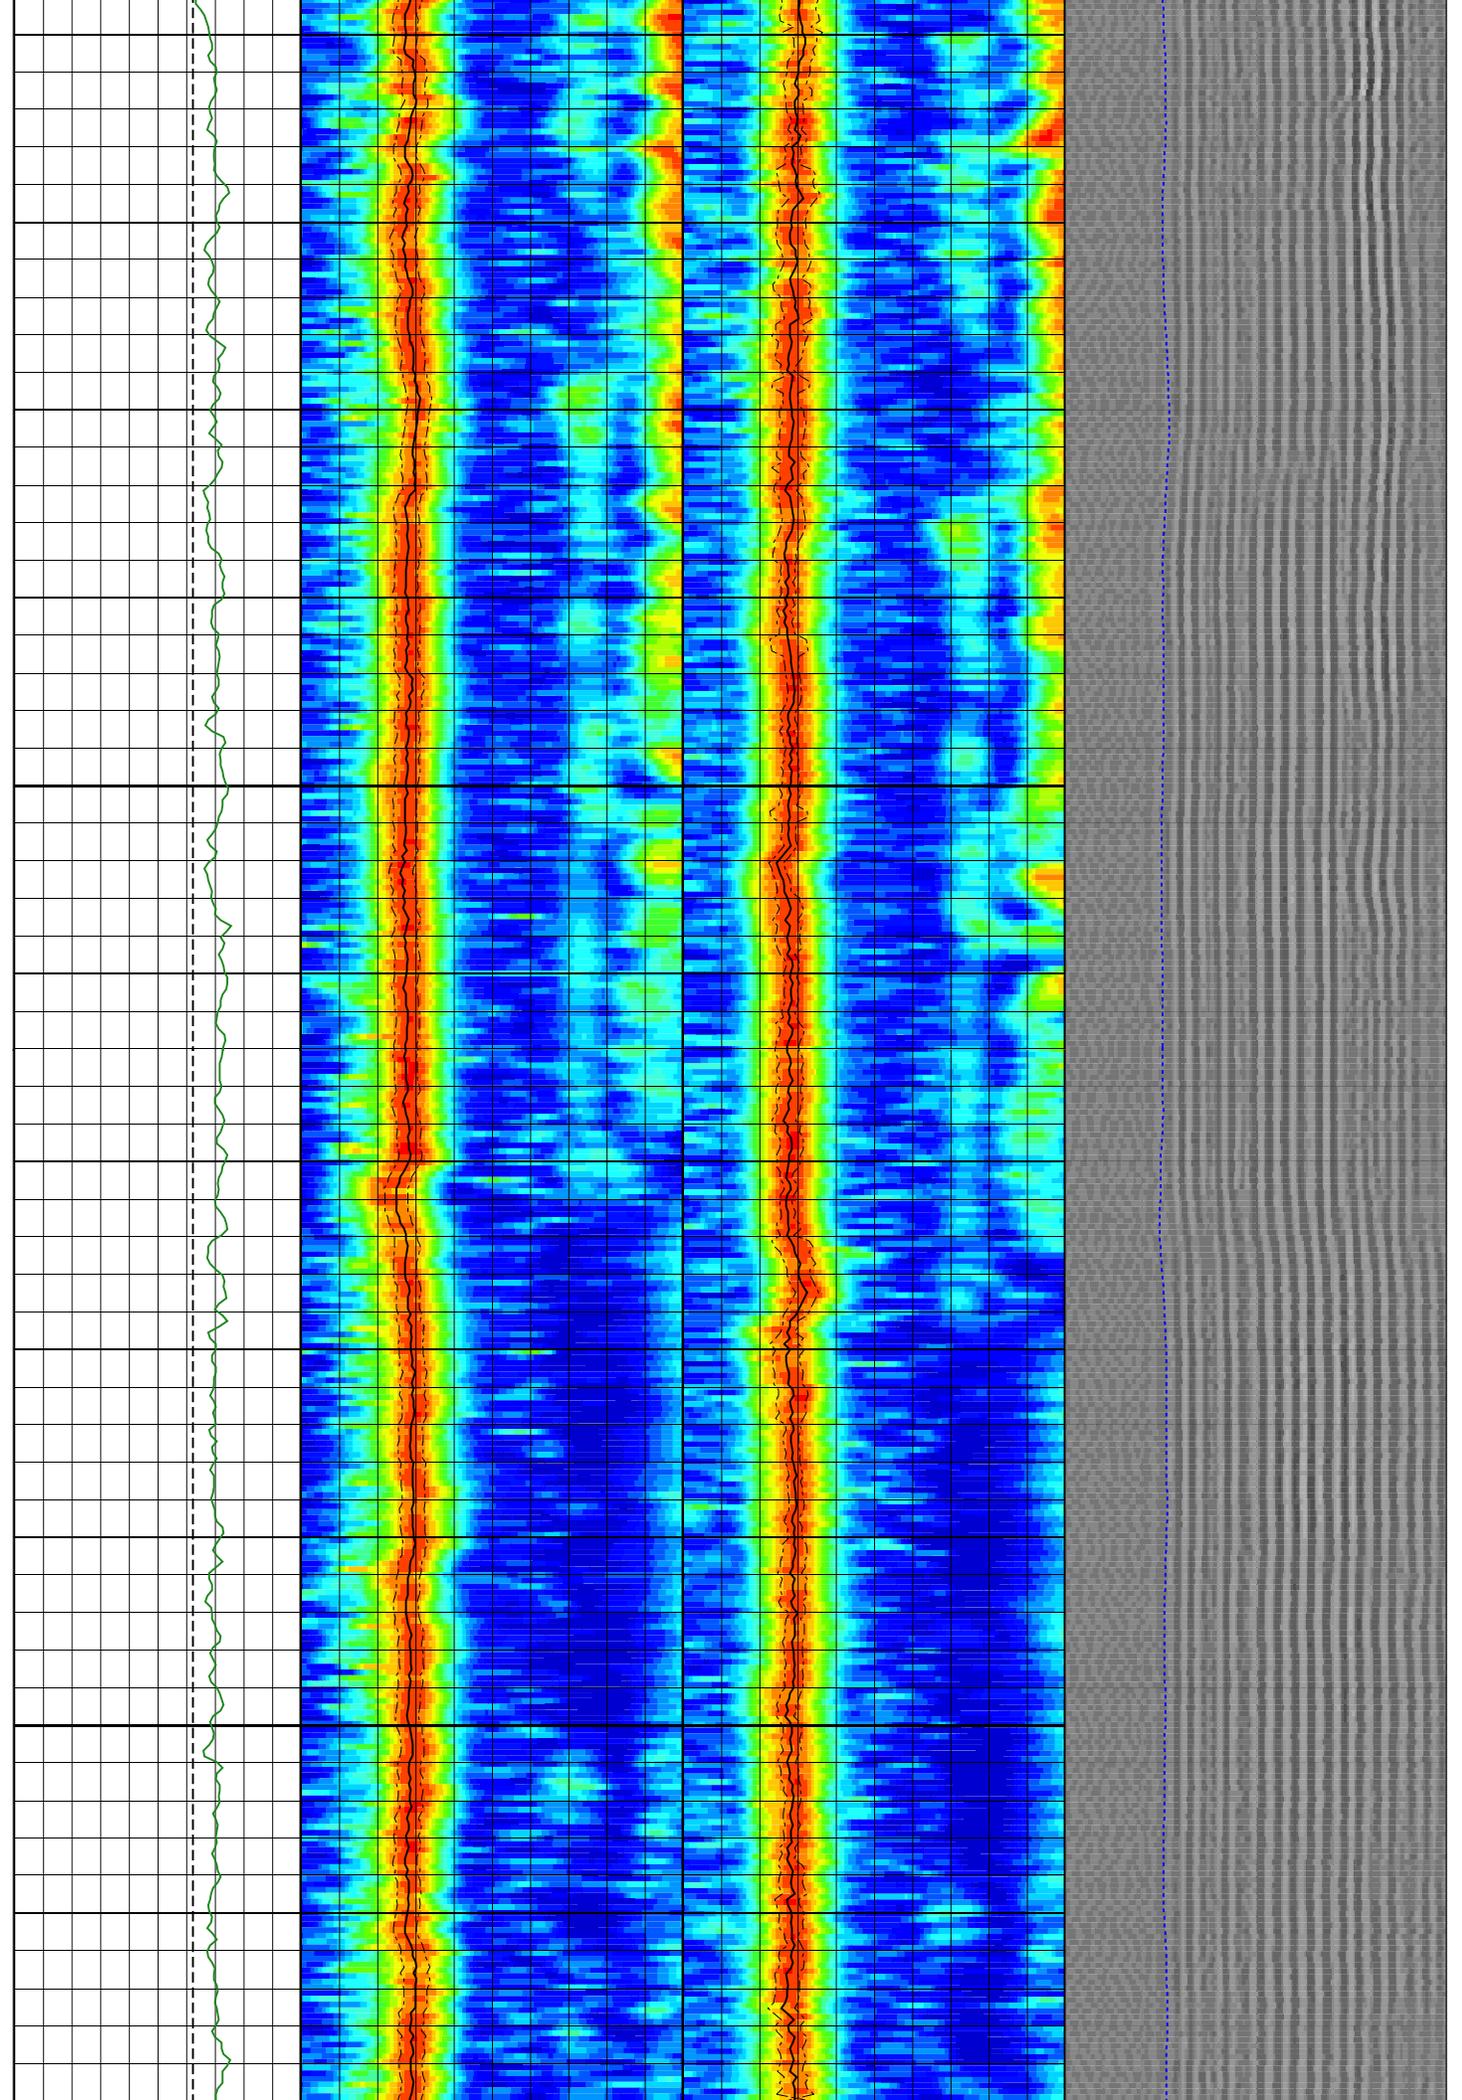

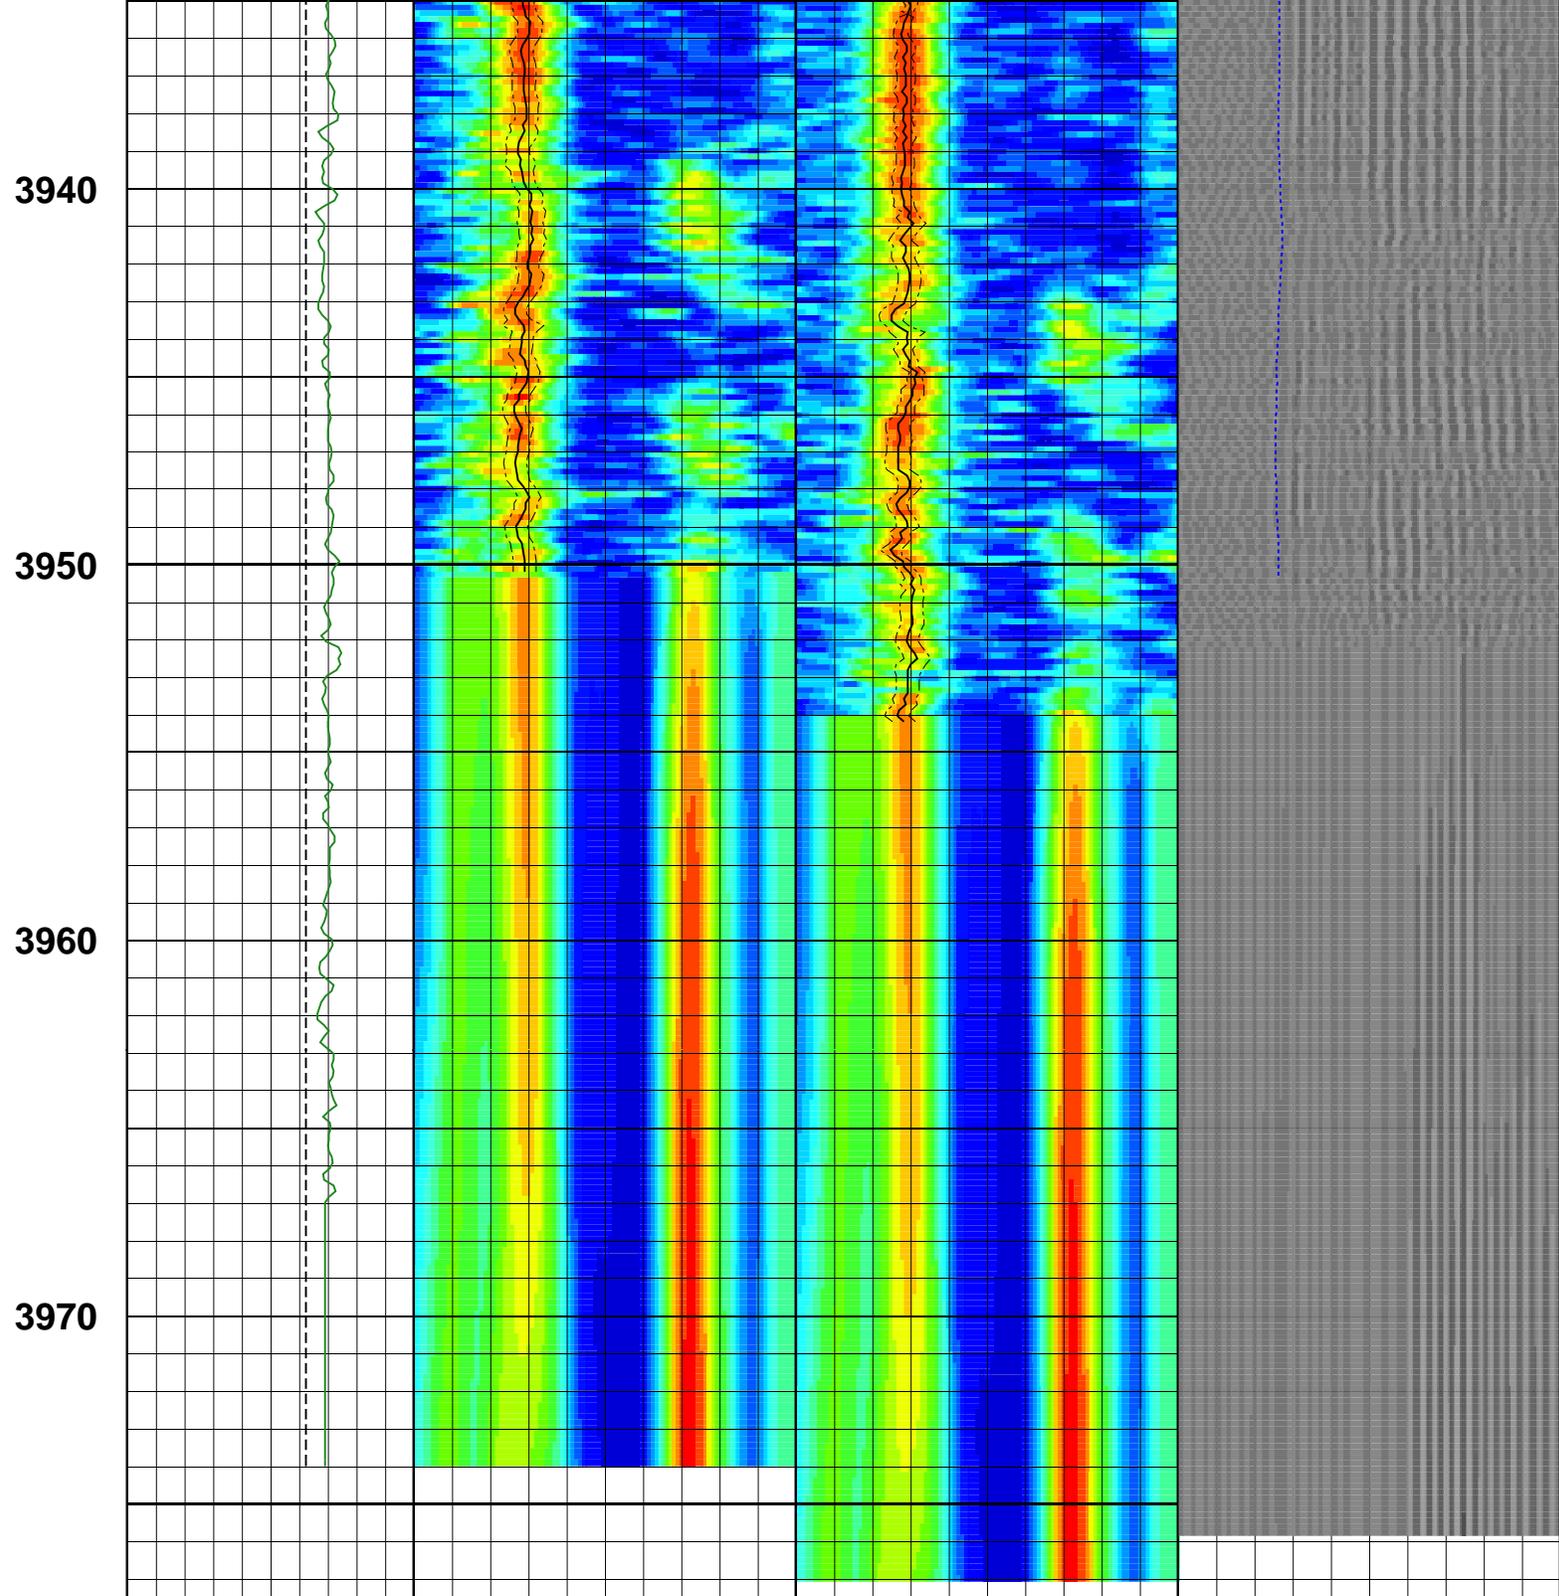

Customized Process: Start Depth (3977.04 m), Stop Depth (2814.52 m), Logging Mode (sonicVISION - MPS_WIDE)
 Noise Cut Filtering(Yes - F-K, WS 22829), Casing Cut Filtering(No)
 WF_FLG(1 1 1 1), MUD_TYPE(Brine), STCAL(Full Array), ENE_THRE_FLG(NO)
 TRSPAC(3.05714), RRSAPAC(0 0.2032 0.4064 0.6096)
 Mud Slowness (no input)
 Hole Diameter (BS@MaxWell_1Dis;1 .REAL-TIME (2814.22 - 3973.98 m))
 Zoning Guide (DTCO@MaxWell_1Dis;1 .RECORDED-MODE (2814.22 - 3973.98 m))
 Tracking Guide (DTRP@BestDT-3;6 .CO .MPS_WIDE .ISONIC .SWP .BDT .EDT (3973.98 - 2814.52 m))

--- Zone Top Depth (0), Zone Name (Zone1) ---
 SFTY(Slow), BHS(OPEN), CSIZ(20), HDM(BS), HD(12.25), DTMUD(185*)
 TWI(277.995), SLL(39.7135), SUL(240.267), SST(1.98568), TLL(379.427), TUL(3238.8), TST(79.4271)
 SBW(2303.39), SBO(297.852), SWD(20), TWD(1726), SEM(0.45), FLENG(49*), FLOW(7500*), FHIGH(14000)
 TKO MODEL ORDER(2) TKO TOI(50) TKO FLOW(0) TKO FHIGH(12000)

MD 1 : 200 m	GR	DtRC	DtTC	TICS
	0 (gAPI) 150	40 (us/ft) 240	40 (us/ft) 240	300 (us) 3278
	Bit Size	STPrjR	STPrjT	WF VDL
	6 (in) 16	40 (us/ft) 240	40 (us/ft) 240	300 (us) 3278

Company:	JAMSTEC		
Well:	C0002F		
FIELD:	Nankai-Kumano		
County:			
Prefecture:	Wakayama		
Date Logged:	27-Oct-2012	Date Processed:	13-Nov-2012
Well Location:	Philippine Sea X= 652,382.39 m		
Elevations:	KB: 28.5m	DF: 28.5m	GL: -1939m
API Number:		Job Number:	